



2015

Commercial / Residential / Chore

POWER EQUIPMENT



**COMMERCIAL
DUTY TOUGH**



A Word from Dan Ariens

When you choose to buy a Gravely you become part of a family. From our humble beginnings when Ben Gravely built his first motorized plow in 1915, to the 1,500 passionate people at Ariens Company today, we proudly carry on the tradition of building commercial-tough, reliable equipment.

Ben Gravely was known to test and re-test every component of his machine for reliability. Today, the design engineers at Ariens Company honor that tenacity by constantly evaluating every mower subsystem and component to maximize your machine's performance. Backed by the resources of Ariens Company, our experts continue to develop Gravely commercial equipment with the same legendary DNA that meets or exceeds the high-wear conditions professional landscape contractors put to the test every day. Professionals know this all adds up to increased durability, longer life, and improved uptime – exactly what you would expect from a premium, American-made product.

High-performance equipment requires personalized service that can only be provided by true outdoor power equipment experts. That's why

we sell Gravely mowing equipment exclusively through a network of independent servicing retailers, and back them up with technical engineers who have an average of 30 years of experience with our products. It all adds up to rugged performance and legendary reliability you can count on, both before and after your purchase.

Whether you are making a capital investment for your landscape business, or you just love the satisfaction of a beautiful yard and the smell of fresh cut grass on a summer afternoon, our family pride comes from knowing we can assure you these important pleasures of life.

Welcome to the family,

Dan Ariens

*President, Ariens Company
Manufacturer of Gravely Equipment*





GRAVELY AN AMERICAN WORKHORSE SINCE 1916



1916

Model D Motorized Plow

Benjamin Franklin Gravely not only invented a revolutionary product in the two-wheeled tractor, he built a brand that changed the way people worked and helped improve their lives. The machine represented durability, independence, and unmatched flexibility. From plows that were powered by actual horses to the invention of motorized plows, horsepower has changed through the years. With 65 patents to his name, Gravely left a legacy of on-going, continuous improvement.



Ben Gravely

The Model D motorized plow represented durability. Today we continue that legacy with our slogan - An American Workhorse Since 1916.

Decades of Performance and Durability.



1940s

Model L Sickle Bar



1960s

424 Tractor



1990s

Pro-Master® 260-Z



2013

Pro-Stance®





Table of Contents

COMMERCIAL

Zero-Turns (Pages 6-19) Gravely commercial zero-turn mowers are an advantage to professional landscape contractors. With 180 degree turning capability, less passes are required to complete each job maximizing efficiency and productivity.

Stand-Ons (Pages 20-21) Gravely's Pro-Stance® series is fast becoming a leader in the industry with commercial landscape contractors adding stand-on mowers to their fleet for increased productivity. A unique aspect of stand-on mowers is the ability to move freely with total control and less fatigue.

Walk-Behinds (Page 22) Gravely commercial walk-behind mowers put the power in your hands. From thick grass to steep hillsides, Gravely's walk-behind mowers provide robust power unrivaled by the competition.

21" Walks (Page 23) Landscape contractors need dependable mowers to stay competitive. Designed to withstand all day, everyday use, the Gravely Commercial Walk is ideal for fleets of all sizes. From the cast aluminum deck to the rugged, commercial engine, these mowers mean business.

Chore (Pages 35-39) With Gravely power at your fingertips, landscaping chores take on a whole new meaning. Built with the same unsurpassed standards of quality, Gravely chore products allow you secure the finishing touch you need season after season.

RESIDENTIAL

Zero-Turns (Pages 26-33) If you want nothing but the best for your landscape, place your trust in the same name brand professionals prefer — Gravely. With a range of residential Gravely mowers to choose from, you're sure to find the ideal landscape solution for your needs.

COMMERCIAL DUTY TOUGH



ULTIMATE SELECTION

Gravely offers gasoline, LP, and Diesel commercial engines with canister air cleaners to ensure lasting performance.

ULTIMATE QUALITY

Hydro Gear® Integrated Transmissions provide smooth operation with 89% fewer leak points versus separate pump and wheel motors.



ULTIMATE RELIABILITY

Gravely commercial spindles are engineered to meet the demands of challenging mowing conditions. These durable, cast iron spindles feature premium components including precision ball bearings and a 100,000 PSI stressproof spindle shaft that withstands the punishment of demanding commercial cutting environments.

ULTIMATE STRENGTH

Gravely commercial mowers are built with heavy gauge steel for unbeatable, long-lasting strength.

ULTIMATE COMFORT

Gravely commercial mowers come complete with suspension seats of varying degrees for all-day comfort.



ULTIMATE DURABILITY

A 7-gauge deck with 1/4" spindle reinforcement and a 1/2" deck integrated wear bar provide superior durability.



Limited
3 Year
XL Spindle®
Warranty

Limited
Lifetime
Frame & Deckshell
Warranty

Pro-Turn™ 400 XDZ Series

ROBUST POWER. EXCEPTIONAL PERFORMANCE.

Discover the ultimate Zero-Turn experience with a Gravelly Pro-Turn 400. Featuring the industry's first air ride seat, dial-adjust height of cut, a 7-gauge fabricated X-Factor™ deck, as well as the widest range of deck sizes and engine options, it's everything you'd expect from a commercial mower and then some.

- 7-Gauge Fabricated X-Factor Deck
- Rugged 3" tall steel frame tubing
- Semi-pneumatic front tires
- Heavy-duty rubber discharge chute
- Sturdy front forks and bearings
- Rubber isolated foot platform
- Fuse block
- Adjustable control arms
- User-friendly, easy deck lift system
- 13.4 gal. fuel capacity
- 13 mph ground speed
- 12V outlet
- Robust 27 – 35hp Kawasaki® engines available
- Efficient 26.5-33 hp Kohler® EFI engines available



ULTIMATE COMFORT

The industry's first air ride seat with isolators provides all-day comfort that can be adjusted with the touch of a button.



ULTIMATE CUT

Dial-adjust height of cut allows the cut height to be adjusted quickly and easily from the operating position. With 19 different cutting positions ranging from 1" to 5.5", there's a setting perfect for every job.



ULTIMATE TRACTION

Radial tires provide superior traction and stability needed to overcome challenging mowing conditions with less damage to the turf.



SCAN TO LEARN
MORE


COMMERCIAL DUTY
TOUGH BROUGHT TO YOU BY **PRO-TURN 400**

WATCH. LEARN. MOW.
GO TO **GRAVELLY.COM**



PRO-TURN™ 400		
MODEL #	DESCRIPTION	DECK SIZE
992245	PT472 35hp Kawasaki® FX1000V	72"
992239	PT472 31hp Kawasaki® FX921V	72"
992249	PT472 33hp Kawasaki® EFI	72"
992244	PT460 35hp Kawasaki® FX1000V	60"
992235	PT460 31 hp Kawasaki® FX921V	60"
992248	PT460 33 hp Kohler® EFI	60"
992233	PT460 26.5 hp Kohler® EFI	60"
992231	PT452 26.5 hp Kohler® EFI	52"
992247	PT452 29 hp Kohler® EFI	52"
992246	PT452 27 hp Kawasaki® FX850V	52"

GRAVELY TECHNOLOGY: ENGINEER TESTED. LANDSCAPER APPROVED.

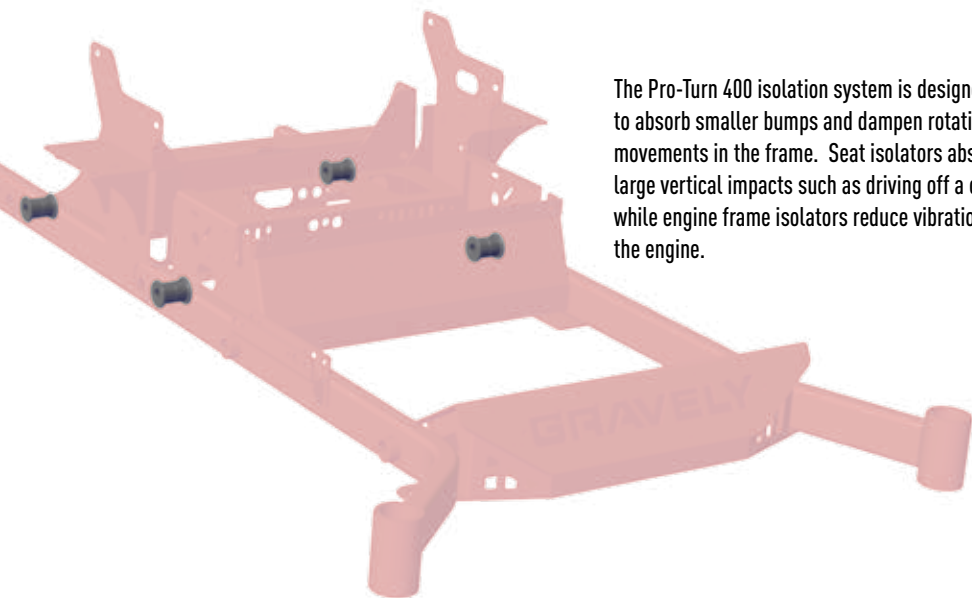

The Pro-Turn 400 isolation system is designed to absorb smaller bumps and dampen rotational movements in the frame. Seat isolators absorb large vertical impacts such as driving off a curb while engine frame isolators reduce vibration from the engine.



Pro-Turn™ 400 XDZ LP Series

POWERED BY CLEAN FUEL

Propane fuel is a green alternative to traditional gas power valued by both contractors and their customers. Benefits of using propane fuel include:

- 20-30% less expensive than current gas prices and 97% domestically produced
- No chance of spilling or shrinkage
- Avoid storage and shelf life issues with tanks certified safe by the DOT for 12 years.



- Robust 27 hp Kawasaki® FX850V LPG engine
- Twin 33.5 lb. propane tanks (sold separately)
- Hydro-Gear® ZT-5400 Integrated Transaxles
- 7-gauge Fabricated X-Factor® Deck
- Rugged 3" tall steel frame tubing
- Semi-pneumatic front tires
- Heavy-duty rubber discharge chute
- Durable front forks and bearings

- Rubber isolated foot platform
- Centrally located fuse block
- Fully adjustable control arms
- User-friendly deck lift
- 12V outlet
- 13 mph ground speed
- Radial Tires

ULTIMATE SAVINGS

Propane fuel costs less per gallon than gasoline and requires less engine maintenance saving money year after year. Propane is a green burning, environmentally friendly fuel alternative that is not considered a greenhouse gas.

ULTIMATE RUN TIME

Gravely Pro-Turn 400 LP mowers have two 33.5 lb. propane tanks providing longer run time and enough fuel to complete large jobs.

ULTIMATE CONVENIENCE

Lawn and garden propane cylinders are specifically designed for mowers indicated by the green ring at the top. These tanks are left hand threaded to ensure you always have the correct tank for the job.

SCAN TO LEARN
MORE



PRO-TURN™ 400 XDZ LP		
MODEL #	DESCRIPTION	DECK SIZE
992243	PT472 27 hp Kawasaki® FX850V LP	72"
992237	PT460 27 hp Kawasaki® FX850V LP	60"



COMMERCIAL DUTY
TOUGH

BROUGHT
TO YOU BY

PRO-TURN 400

Pro-Turn™ 400 XDZ Diesel Series

**DIESEL ENGINES
INCREASE
POWER.**



ULTIMATE CONVENIENCE

Gas shock holds open the radiator hood for easy access to the engine making it easy to perform maintenance.


ULTIMATE EFFICIENCY

Diesel fuel is more fuel efficient than gasoline because it packs more energy per gallon.


ULTIMATE COMFORT

Gravelly's radiator design cools the engine and keeps the operator cool by directing heat down and away from the operator.

- Reliable 25 hp Kubota® Diesel engine
- 4-cycle liquid cooled 3-cylinder engine
- Fuel efficient with greater torque
- Biodiesel ready
- 7-Gauge Fabricated X-Factor® Deck
- Hydro-Gear® ZT-5400 integrated transaxles
- Radial tires
- Centrally located fuse block
- Rugged 3" tall steel frame tubing
- Semi-pneumatic front tires
- Rubber isolated foot platform
- Fully adjustable control arms and deck lift
- 13.4 gal. fuel capacity
- 13 mph ground speed
- 12V outlet

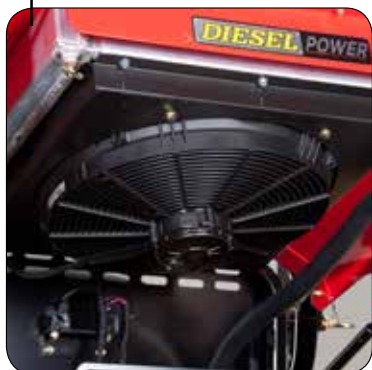

SCAN TO LEARN
MORE



PRO-TURN™ 400 XDZ DIESEL


MODEL #	DESCRIPTION	DECK SIZE
992240	PT472 25 hp Kubota® Diesel	72"
992236	PT460 25 hp Kubota® Diesel	60"

Kubota

The 25 hp Kubota® Diesel engine fosters increased productivity with maximum torque while remaining fuel efficient. Engineered to provide years of reliable performance, it comes backed by a 2-year/2,000 hour warranty and a 3-year/3,000 our major component warranty.



PERFORMANCE CURVE

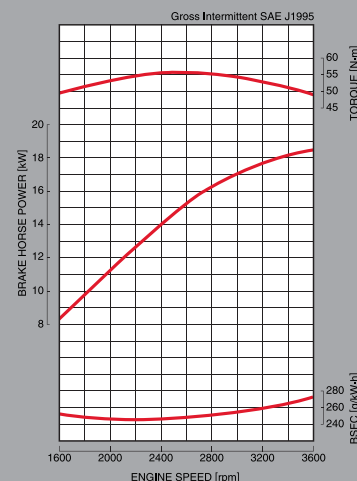

Pro-Turn™ 200 XDZ Series

DEPENDABLE PERFORMANCE SUPERIOR RESULTS.

When you want a machine that's built to last with all the essential features a professional landscaper requires, look no further than a Gravelly Pro-Turn 200. Choose from a selection of cutting widths from 52" to 72" on a unit that comes complete with a comfortable operating zone, a full suspension seat, user-friendly controls, and a large fuel capacity to tackle jobs of all sizes. Designed for rugged, all-day use, the Gravelly Pro-Turn 200 delivers with a superior quality of cut, solid construction, and unsurpassed comfort for operators of all sizes.




ULTIMATE PRODUCTIVITY

With a top speed of 13 mph, the Pro-Turn 200 is fast and efficient.

13
MPH

ULTIMATE VERSATILITY

Simplified yet thoughtfully engineered deck lift provides 17 cutting positions with 1/4" increments from 1.5" to 5.5".

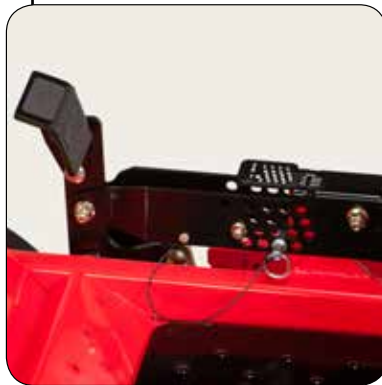

ULTIMATE MANEUVERABILITY

Strong front forks with larger fork shafts and bearings provide added durability while increasing maneuverability.



SCAN TO LEARN
MORE

COMMERCIAL DUTY
TOUGH BROUGHT TO YOU BY **PRO-TURN 200**

WATCH. LEARN. MOW.
GO TO **GRAVELY.COM**



- Robust Kawasaki™ FX and efficient Kohler® EFI engine options
- 7-Gauge fabricated X-Factor® deck
- Redesigned, user-friendly dash knobs and steering controls
- Rugged 3" tall steel frame tubing
- Wide stance for hillside stability
- 13.4 gal. fuel capacity
- Industry-leading 1 ¼" front forks with larger fork shafts and bearings
- Foldable ROPS comes standard
- Centrally located fuse block
- Large, flip-up foot plate
- Left side fuel valve for easy refueling



HYDRO-GEAR® COMMERCIAL

Enjoy the benefit of peak performance with 89% fewer leak points as compared to separate pump and wheel motor transmissions with a Hydro-Gear ZT-5400 transmission which features:

- Heavy-duty commercial grade transaxle
- Industry-leading 1 3/8" axle suitable for heavy loads
- High efficiency 16cc pump/21cc motor
- Performance package
 - Shock valves
 - Planetary gears
 - Charge pumps



ZT5400 Hydro-Gear transmission is eligible for optional 3 year warranty. See dealer for details.

PRO-TURN™ 200		
MODEL #	DESCRIPTION	DECK SIZE
992255	PT272 31 hp Kawasaki® FX921V	72"
992252	PT260 25 hp Kohler® ZT740	60"
992262	PT260 26.5 hp Kohler® EFI	60"
992254	PT260 27 hp Kawasaki® FX850V	60"
992257	PT260 29 hp Kohler® EFI	60"
992256	PT252 29 hp Kohler® EFI	52"
992253	PT252 23.5 hp Kawasaki® FX730V	52"
992261	PT252 26.5 hp Kohler® EFI	52"

Pro-Turn™ 100 XDZ Series



Conquer the terrain and create a professionally manicured cut with a Gravelly Pro-Turn 100. These high-quality machines provide superior cut quality to meet your commercial needs and boost business opportunities. Choose from 48", 52", or 60" deck width and robust engine options.

ULTIMATE COMFORT

A full-suspension seat with arm rests cradle the operator for all-day mowing comfort.




ULTIMATE CONTROL

Easy-to-use, ergonomically positioned control panel fosters smooth operation.



ULTIMATE STRENGTH

Dogbone style drag links don't wear like chains do so it's easier to level the deck and keep level.

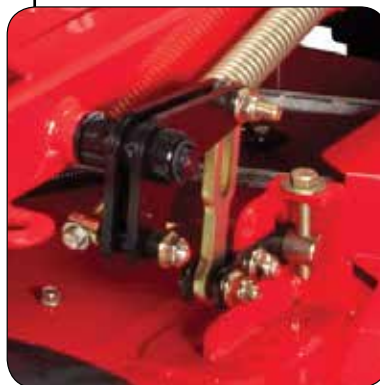

COMMERCIAL DUTY
TOUGH

BROUGHT
TO YOU BY

PRO-TURN 100

WATCH. LEARN. MOW.
GO TO **GRAVELLY.COM**

FIRST CLASS FEATURES. ESSENTIAL STRENGTH.



- Full-suspension seat with arm rests
- 7-Gauge Fabricated X-Factor™ Deck
- Hydro-Gear® ZT-3400 integrated transaxles
- Deck lift with 17 cutting positions in 1/4" increments ranging from 1.5" to 5.5".
- User-friendly, adjustable controls
- 10 gal. fuel capacity with dual tanks
- Foldable ROPS comes standard
- Durable front forks with large fork shafts and bearings
- Double sided anti-scalp wheels
- 10 mph ground speed

PRO-TURN™ 100		
MODEL #	DESCRIPTION	DECK SIZE
991081	PT160 23.5 hp Kawasaki® FX730V	60"
991097	PT160 25 hp Kohler® EFI	60"
991117	PT160 25 hp Kohler® ZT740	60"
991080	PT152 22 hp Kawasaki® FX691V	52"
991096	PT152 23 hp Kohler® EFI	52"
991116	PT152 23 hp Kohler® ZT730	52"
991115	PT148 23 hp Kohler® ZT730	48"
991079	PT148 22 hp Kawasaki® FX691V	48"
991095	PT148 23 hp Kohler® EFI	48"



SCAN TO LEARN
MORE

X-FACTOR® DECK

Achieve a superior quality of cut with the same commercial X-Factor deck found on large Pro-Turn 200 and 400 models. Made of rugged 7-gauge steel with front and rear baffles for long-lasting performance, X-Factor decks feature a 1/2" thick wear bar incorporated into the front of the deck for added support in challenging mowing conditions. Additional 1/4" thick spindle reinforcement provides supports maintenance-free XL spindles for reliable performance. Double sided anti-scalp wheels eliminate bending and breaking of scalp rollers while a heavy-duty rubber discharge chute provides the flexibility needed to minimize damage to surrounding landscape features. (Shown with optional mulch kit.)



Pro-Turn™ Series

COMMERCIAL QUALITY. UNSURPASSED RESULTS.

For a professional mower that's ideal for starting out or adding on, invest your money wisely with a Gravelly Pro-Turn. Engineered to overcome the challenges of varying mowing conditions and strenuous all-day operation, the Gravelly Pro-Turn series combines exceptional durability and convenient, user-friendly features to ensure long-term customer satisfaction.

- 10-Gauge Fabricated Deck
- Hydro-Gear® ZT-3200 integrated transaxles
- Foot operated deck lift provides 15 cutting positions ranging from 1" to 5" with ¼" increments
- Large drive wheels 22 X 10-10
- User-friendly, adjustable controls
- 6 gal. fuel capacity
- Foldable ROPS comes standard
- Strong front forks with large fork shafts and bearings
- Double sided anti-scalp wheels
- 9 mph ground speed



ULTIMATE COMFORT

A high-back suspension seat with adjustable arm rests and rubber isolators ensures all-day comfort.




ULTIMATE VERSATILITY

ROPS comes standard for added safety with the ability to fold it down when mowing under trees.



ULTIMATE CONVENIENCE

Flip-up foot pan provides easy access to belts while reducing maintenance time.

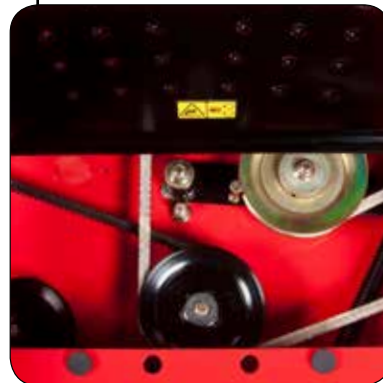

COMMERCIAL DUTY
TOUGH BROUGHT TO YOU BY **PRO-TURN**

WATCH. LEARN. MOW.
GO TO **GRAVELLY.COM**



PRO-TURN™ SERIES

MODEL #	DESCRIPTION	DECK SIZE
991203	PT60 25 hp Briggs & Stratton® Commercial Turf	60"
991202	PT60 24 hp Kawasaki® FS730V	60"
991208	PT52 23 hp Briggs & Stratton® Commercial Turf	52"
991201	PT52 23 hp Kawasaki® FS691V	52"
991200	PT48 23 hp Kawasaki® FS691V	48"



HYDRO-GEAR® COMMERCIAL

Enjoy the benefit of peak performance with 89% fewer leak points as compared to separate pump and wheel motor transmissions with a Hydro-Gear ZT-3200 integrated transaxles.

- Industry-leading 1 1/8" axle suitable for heavy loads
- High efficiency 10cc pump/16cc motor
- Commercial grade transaxle
- Performance package
 - Shock valves
 - Cut steel gears
 - Charge pumps
 - 9 mph ground speed



SCAN TO LEARN
MORE

Commercial Baggers & Accessories

3-Bucket Commercial Bagger

- Fabric cover provides improved airflow and venting. It also won't crack like plastic covers
- Top opens fully and is held open by gas cylinders
- 12 bushel capacity
- Includes: Blower, bag frame, three bags, tube, and weight kit
- Fits Pro-Turn 200 and 400 mowers with X-Factor™ decks (excluding diesel units)



2-Bucket Commercial Bagger

- Fabric cover provides improved airflow and venting. It also won't crack like plastic covers
- Top opens fully and is held open by gas cylinders
- 8 bushel capacity
- Fits Pro-Turn and Pro-Turn 100 mowers with X-Factor™ decks

Dump from Seat Bagger

- Dump from seat bagger accessory inserts into a 3-bucket powered bagger for an easy way to empty the bagger without having to leave the operator position
- Clam shell design slides into existing bagging system and that opens with the flip of a switch on the mower control panel
- 9 bushel capacity
- Includes: dump from seat insert only; must be used in conjunction with 3-bucket commercial bagger
- Fits Pro-Turn 200 and 400 mowers with X-Factor™ decks (excluding diesel units)



ACCESSORIZE YOUR RIDE

Mulch Kit (X-FACTOR® Deck)

This easy to install deck features separate cutting chambers for each blade in order to produce smaller clippings for a professionally manicured appearance.



Sunshade

Stay cool and protected from the sun during all-day mowing.



Professional Head Light Kit

Extend mowing time in low-light conditions with a headlight kit.



Powered Deck Lift

Make smooth, easy cutting height adjustments with a powered lift kit.




Operator Controlled Discharge Chute

Easily control the dispersion of grass clippings directly from the operator position to prevent clippings from being spread across walkways, flowerbeds, and other unwanted areas.



Hitch Kit

Elevate the versatility of your Gravely® zero-turn with a hitch kit that provides a variety of tow-behind options.



SCAN TO LEARN
MORE

Chrome Wheel Covers

Add a touch of personalized detail to your zero-turn with chrome wheel covers available for both front and rear wheels in 6", 10", and 12" sizes.



Compact-Pro™ Series

ULTIMATE FLEXIBILITY. RELIABLE RESULTS.




Compact-Pro 34

- 7-Gauge fabricated deck with 1/4" spindle reinforcement
- Hydrostatic Hydro-Gear® 10cc pump with Hydro-Gear 12 c.i. wheel motors
- Quick release deck lift with 9 cutting heights in 1/2" increments
- Adjustable flip out controls suit operators of all sizes
- 7.3 gal. fuel capacity with dual tanks
- 9 mph forward speed and 4.5 mph reverse speed

Compact-Pro 44

- 10-Gauge fabricated deck
- Hydro-Gear® ZT-3100 transaxles
- Quick release deck lift with 9 cutting heights in 1/2" increments
- Adjustable flip out controls suit operators of all sizes
- 9.4 gal. fuel capacity with dual tanks
- 8 mph forward speed and 4 mph reverse speed



SCAN TO LEARN MORE

ULTIMATE PERFORMANCE

Kawasaki® FX engines are 90 degree V-Twin engines that offer power and smooth operation with dual canister air filters for optimal performance in all conditions.



ULTIMATE COMFORT

High-back seat with armrests comfortably cradles operator to minimize fatigue.



Smaller footprint allows more units to be transported on a trailer; the Compact-Pro™ 34 can easily pass through a 36" gate

COMPACT PRO™		
MODEL #	DESCRIPTION	DECK SIZE
991088	Compact Pro 34 15.5 hp Kawasaki® FX481V	34"
991089	Compact Pro 44 19 hp Kawasaki® FX600V	44"

COMMERCIAL DUTY
TOUGH BROUGHT TO YOU BY **ZERO-TURNS**

WATCH. LEARN. MOW.
GO TO **GRAVELY.COM**

Pro-Master™ 200 XDZ Series

QUICK. VERSATILE. GRAVELLY.

- Robust 27 hp Kawasaki® FX engine
- Hydrostatic Hydro-Gear® 21cc pump with Parker® 18 c.i. wheel motors
- Side or rear discharge deck options
- 7-Gauge fabricated deck with 1/4" spindle reinforcement
- High-back seat with arm rests
- Adjustable flip out control arms suit operators of all sizes
- 13.4 gal. fuel capacity
- 13 mph forward speed and 6 mph reverse speed
- Large 24 X 11.5-12 rear tires

ULTIMATE VERSATILITY

Hydraulic deck lift comes standard for ease of raising and lowering the deck as well as changing height of cut between 1-5" with infinite number of settings.




ULTIMATE STABILITY

Lockable and floating front axle easily adjusts to uneven terrain for superior stability and operator comfort.



ULTIMATE EFFICIENCY

Rear discharge deck is suitable for cemeteries, roadside mowing, and other locations where side discharge is undesirable. Clippings are evenly dispersed behind the mower reducing the need for clean up.



SCAN TO LEARN
MORE

PRO-MASTER™ 200 XDZ SERIES

MODEL #	DESCRIPTION	DECK SIZE
992217	Pro-Master 260 27 hp Kawasaki® FX 850V	60"
992219	Pro-Master 260 RD 27 hp Kawasaki® FX 850V	60"



GRAVELLY

Pro-Stance® Series



ULTIMATE CONTROL

Dial-adjust height-of-cut allows the operator to quickly and easily change the height of the deck directly from the control panel without stepping off the unit.



ULTIMATE RESULTS

The X-Factor® deck, the same superior deck found in our zero turn mowers, made of rugged 7-gauge steel with a 1/2" thick wear bar providing superior durability for years of reliable performance. Separate cutting chambers for each blade produce smaller grass clippings while a heavy-duty rubber discharge chute minimizes damage to the surrounding landscape.



SCAN TO LEARN
MORE

COMMERCIAL DUTY
TOUGH BROUGHT TO YOU BY **PRO-STANCE**

WATCH. LEARN. MOW.
GO TO **GRAVELY.COM**

A FUSION OF VERSATILITY, CONVENIENCE, & EFFICIENCY

Take charge of mowing by standing upright which allows you to move freely with less fatigue. Engineered to provide the ultimate in versatility and efficiency, the Gravelly Pro-Stance allows the operator to maneuver quickly and dismount easily to tackle important tasks. By combining everything users value in a walk-behind mower with everything they love in a zero-turn, the Pro-Stance is a responsive machine that provides long-lasting, reliable performance, and comfort ideal for commercial applications.



PRO-STANCE®		
MODEL #	DESCRIPTION	DECK SIZE
994124	60 FL 25 hp Kohler® EFI	60"
994123	60 FL 23.5 hp Kawasaki® FX730V	60"
994130	52 FL 23 hp Kohler® EFI	52"
994128	52 FL 22 hp Kawasaki® FX691V	52"
994121	52 FL 23 hp Kohler® ZT730	52"
994122	52 FL 24 hp Kohler® EFI LP	52"
994126	48 FL 22 hp Kawasaki® FX691V	48"
994119	36 FL 19 hp Kawasaki® FS600V	36"

- Flip up foot platform allows the unit to function as a stand-on or walk-behind
- Foot platform with rubber isolators reduces vibration for comfort
- 7-Gauge fabricated X-Factor® deck (48"-60")
- 9 gal. fuel capacity (48"-60"), 6 gal. fuel capacity (36")
- Fenders keep the unit and operator clean
- Deck transport lock-out
- Large contoured operator pad
- Industry's largest semi-pneumatic front tires 13 x 6.5-6
- Large 20 X 10.5-8 drive wheels
- Double sided anti-scalp wheels
- Adjustable speed control bar

INDUSTRY FIRST

Integrated Hydro-Gear® ZT-3400 (ZT-3100 on 36") transmissions provide a lower center of gravity for increased hillside stability with fewer leak points and smooth operation at ground speeds up to 9 mph (8 mph on 36").

- Commercial grade transaxle
- Large 1 1/8" axle for heavy loads
- High efficiency 12cc pump/16cc motor
- Performance package
 - Shock valves
 - Cut steel gears
 - Charge pumps
 - Up to 9 mph ground speed



ZT3400 Hydro-Gear transmissions (48, 52, 60) are eligible for 3 year commercial warranty. See dealer for details.

Pro-Walk™ Series

WALK TO A FLAWLESS FINISH



PRO-WALK GEAR MODELS

MODEL #	DESCRIPTION	DECK SIZE
988152	48GR 14.5 hp Kawasaki® FS481V	48"
988151	36GR 14.5 hp Kawasaki® FS481V	36"
988150	32GR 14.5 hp Kawasaki® FS481V	32"

GEAR MODEL

- Peerless 5 speed transmission
- Lockable, floating 7-gauge deck
- 5.4 mph forward speed with reverse assist
- Electric PTO

GEAR ACCESSORIES AVAILABLE:

- Grass catcher attachment kit
- Mulch kit
- 3 cu. ft. grass collector
- 4 cu. ft. grass collector



A WORKHORSE TO COUNT ON FOR PRO RESULTS.

HYDRO MODEL

- 10cc pumps and 12 c.i. motors
- 7 mph forward speed, 3 mph reverse speed
- Electric PTO
- Electric start (48" decks and larger)
- Lockable and floating 7-gauge deck
- Solid foam filled front tires

PRO-WALK HYDRO MODELS

MODEL #	DESCRIPTION	DECK SIZE
988159	61HE PS 23 hp Kawasaki® FS691V	61"
988169	61 HE PG 23 hp Kawasaki® FS691V	61"
988155	52 HE PG 18.5 hp Kawasaki® FS600V	52"
988158	52 HE PS 18.5 hp Kawasaki® FS600V	52"
988154	48 HE PG 18.5 hp Kawasaki® FS600V	48"
988157	48 HE PS 18.5 hp Kawasaki® FS600V	48"
988170	48 HE PG 22 hp Kohler® EFI LP	48"
988153	36 HR PG 14.5 hp Kawasaki® FS481V	36"
988156	36 HR PS 14.5 hp Kawasaki® FS481V	36"

HYDRO ACCESSORIES AVAILABLE:

- Single or two-wheel sulky
- 30 lb. weight kit
- Side grass catcher
- Operator controlled discharge baffle
- Mulch kit
- 3 cu. ft. grass collector
- 4 cu. ft. grass collector
- Grass catcher attachment bracket



SCAN TO LEARN
MORE



COMMERCIAL DUTY
TOUGH BROUGHT TO YOU BY **WALK-BEHINDS**

WATCH. LEARN. MOW.
GO TO **GRAVELY.COM**

Commercial 21

DURABLE DESIGN. QUALITY COMPONENTS.

The Gravely Commercial 21 provides superior durability and an unsurpassed quality of cut unrivaled by other walk-behind mowers. Complete with a cast aluminum deck, 3-speed heavy-duty transmission, and a powerful Kawasaki® FJ180V KAI engine, the Commercial 21 is the walk-behind pros prefer.

- 9" cast aluminum wheels for smooth performance on rough terrain
- Dual sealed ball bearings and steel stabilizer bushings stand up to rugged, everyday use
- Replaceable high durometer rubber tires resist wear and tear
- Available in zone start or BBC configurations
- Adjustable handlebar height for operator comfort
- Greaseable rear axle hubs with zerk fittings and dust seals ensure long life
- Deck edge guards prevent premature wear
- 7 height-of-cut adjustments from 1" to 4"
- 2.5 bushel bag capacity

ULTIMATE DURABILITY

The Cast Aluminum Deck ensures longevity and unmatched cutting performance when bagging or mulching grass. The deep tunnel design of the deck maximizes air flow and suction for a clean cut every time.



ULTIMATE CONTROL

Three speed, shift-on-the-fly transmission with steel cut gears and full ball bearings allows the operator to adjust to mowing conditions with ease.



ULTIMATE POWER

Rugged Kawasaki FJ180V KAI engine is built for every day professional use. A high capacity air filter and spin on oil filter extend the time frame between maintenance intervals.



SCAN TO LEARN
MORE



COMMERCIAL 21

MODEL NUMBER	DESCRIPTION	TYPE	DECK SIZE
911282	Kawasaki® FJ180V KAI	Self-Propelled, Zone Start	21"
911290	Kawasaki® FJ180V KAI	Self-Propelled, BBC	21"



E824

KING OF THE HILL



POWER OR FUEL SAVINGS — that was your choice. Until now. Say hello to the **all-new Command PRO® EFI 824**. With best-in-class* torque and horsepower it's ready to take on any terrain. And with the \$600/year** you save on fuel, it's the most fuel-efficient engine we've ever made. Man, it's good to be king.

*Class defined as vertical-shaft, commercial 800cc to 875cc gasoline engines. **Compared to a comparable KOHLER carbureted engine under comparable loads and duty cycles. Based on 600 hours of annual operation.

KOHLER Engines

KohlerEngines.com/824

Gravely Residential Mowers

Zero-Turns

Homeowners that insist on nothing but the best for their landscape trust Gravely to get the job done right. With a wide selection of zero-turn mowers to choose from, there's a machine ideal for landscapes of all shapes and sizes. Complete with many of the features typically found on commercial units, the Gravely HD series features zero-turn technology which reduces the number of passes required to cut mowing time in half. Easy to maneuver and efficient, zero-turns are a smart investment for any homeowner with a medium to large yard that desire a mower that will be dependable for years to come.

**PROFESSIONAL
QUALITY,
HOMEOWNER
PRIDE**



WATCH. LEARN. MOW.
GO TO » GRAVELY.COM

Go online to see:

- Product Feature Walk Around Videos
- Side by Side Comparisons
- Rider Reviews

GRAVELLY



- 4-point commercial style deck for lasting durability
- Rugged tapered roller bearings with 3/8" front caster forks
- Flip-up floor pan for easy access to the top of the deck
- Adjustable flip out control arms allow for easy access to and from the operating position
- 44", 48", 52", and 60" deck options
- Six anti-scalp rollers reduce turf wear
- 8 mph forward speed and 4 mph reverse speed
- 6 gal. fuel capacity
- High-back seat with armrests ensures operator comfort
- Foot operated deck lift system allows for easy adjustments

ULTIMATE POWER

Kawasaki® provides professional quality results. Each engine is built to last and comes backed by a 3-year manufacturer's warranty.



ULTIMATE DURABILITY

Hydro-Gear® ZT-3100 transmissions provide more torque with fewer parts to reduce leak points and maintenance over standard pump and wheel motor style transmissions.



ULTIMATE STRENGTH

Equipped with maintenance-free, commercial spindles with cast iron housings and sealed ball bearings engineered to withstand the elements.



SCAN TO LEARN
MORE

**RUGGED AND
RELIABLE** BROUGHT TO YOU BY **ZT HD**

ZT HD Series

CUT LIKE A PRO

Maintain acres of property with a powerful, efficient ZT HD Series mower. Superior, commercial quality construction and first-class features make this machine a top of the line mower ideal for the discerning homeowner.



ZTHD		
MODEL #	DESCRIPTION	DECK SIZE
991107	Kohler® 7000 PRO Twin w/Smart Choke 24 hp/725CC	44"
991108	Kohler® 7000 PRO Twin w/Smart Choke 25 hp/725CC	48"
991082	Kawasaki® FR Twin 23 hp/726CC	48"
991109	Kohler® 7000 PRO Twin w/Smart Choke 25 hp/725CC	52"
991083	Kawasaki® FR Twin 23 hp/726CC	52"
991110	Kohler® 7000 PRO Twin w/Smart Choke 26 hp/747CC	60"
991084	Kawasaki® FR Twin 24 hp/726CC	60"



CONSUMER




COMMERCIAL



GRAVELY TECHNOLOGY: ENGINEER TESTED. HOMEOWNER PROVEN.

The deck of a ZT HD is fabricated from 10-gauge steel ensuring long-lasting performance that can handle years of use. It's also 5 1/2" deep in order to provide proper air flow to overcome challenging mowing conditions with ease.

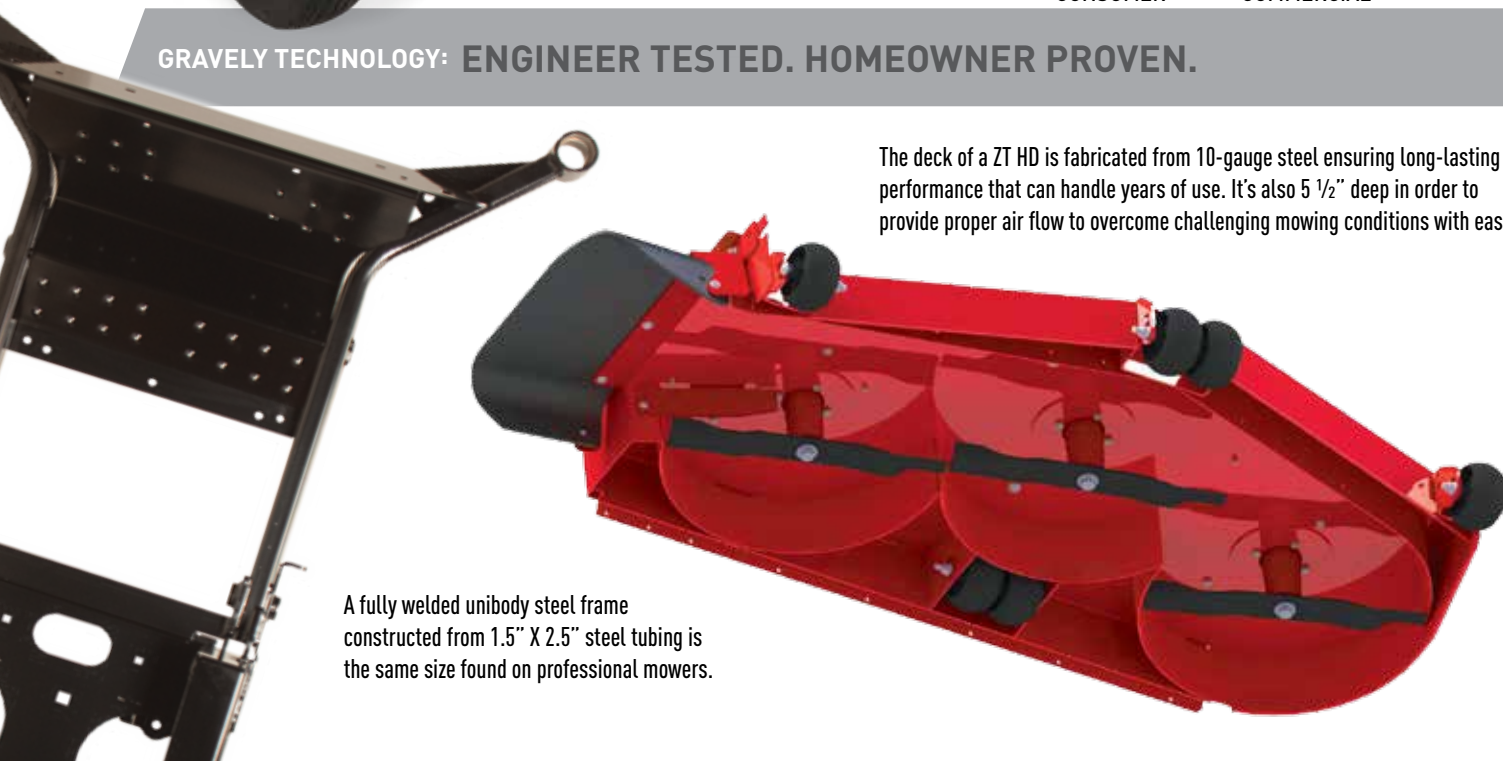

A fully welded unibody steel frame constructed from 1.5" X 2.5" steel tubing is the same size found on professional mowers.

ZT XL Series

CREATE YARD ENVY

When a beautiful lawn is high on your priority list, you belong in the seat of a ZT XL. Built with commercial quality in mind, the ZT XL comes equipped with features typically found on more expensive, commercial equipment. Manufactured from 10-gauge steel reinforced with a wear strip for robust strength and durability, the ZT XL comes in three different sizes to accommodate the versatile needs of today's consumers.

- 4-point hanging deck system for unrivaled stability
- Flip-up floor pan for easy access to the top of the deck
- Adjustable flip out control arms provide easy access to and from the operating position
- 42", 48", and 54" deck options
- 4 anti-scalp rollers reduce turf wear
- 6.5 mph forward speed and 3 mph reverse speed
- 3.8 gal. fuel capacity
- High-back seat with arm rests ensures operator comfort
- Foot operated deck lift system for easy adjustments
- Cut of height is adjustable from 1.5" to 4.5" in 1/2" increments


ULTIMATE PERFORMANCE

Hydro-Gear® ZT 2800 transaxles allow for smooth, variable control with a zero-turn radius and years of dependable performance with fewer leak points than other systems.



ULTIMATE RESULTS

10-gauge steel deck with reinforced wear strip provide unmatched durability while fostering increased airflow ensuring a clean, manicured cut with even dispersal of clippings.

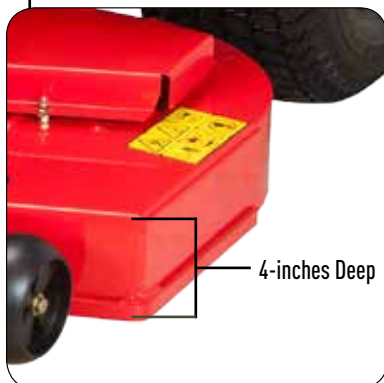

ULTIMATE POWER

Kohler® 7000 Series engine provides ultimate power including PRO performance package for extra protection. Smart Choke™ technology combines for the most reliable easy starting technology.



**RUGGED AND
RELIABLE** BROUGHT
TO YOU BY **ZT XL**

WATCH. LEARN. MOW.
GO TO **GRAVELY.COM**





ZT XL		
MODEL #	DESCRIPTION	DECK SIZE
915184	Kohler® 7000 PRO Twin w/Smart Choke 24 hp/725CC	42"
915186	Kohler® 7000 PRO Twin w/Smart Choke 25 hp/725CC	48"
915188	Kohler® 7000 PRO Twin w/Smart Choke 25 hp/725CC	54"



A fully welded tubular steel frame constructed of 1" X 2" steel tubing provides superior strength over competitive frames which are often bolted together. The body is also wider with a lower center of gravity to improve stability and traction on varying terrain.

ZT Series

HOMEOWNER PRIDE

Show the pride you have as a homeowner with a flawless, manicured landscape. Equipped with a 12-gauge all-steel XLERator™ Deck, maintenance-free front castor fork bushings, and a 4-point deck lift system, a Gravelly ZT series mower is sure to provide years of super performance and a high-quality of cut that will leave your neighbors green with envy.



- 4-point deck lift system provides unmatched deck stability
- 12-gauge stamped steel XLERator™ deck with rolled lip
- Low center of gravity for increased stability and traction
- Adjustable flip out control arms provide easy access to and from the operating position
- 34", 42", and 50" deck options
- 6 mph forward speed and 3 mph reverse speed
- Deck washout port for convenient cleaning after use (42 and 50 only)
- Maintenance-free front castor fork bushings
- High-back seat with arm rests ensures operator comfort

ULTIMATE CONTROL

Foot operated deck lift with 7 cutting heights ranging from 1.5" to 4.5" is convenient and easy to operate.



ULTIMATE COMFORT

A high-back seat with thick, padded controls and dampened steering technology cradle the operator in comfort.



ULTIMATE STRENGTH

Heavy-duty c-channel steel frame with welded joints provides structural stability for increased strength and durability.



**RUGGED AND
RELIABLE** BROUGHT
TO YOU BY **ZT**

WATCH. LEARN. MOW.
GO TO **GRAVELLY.COM**



Powered by

KOHLER
ENGINES


CONSUMER



ZT		
MODEL #	DESCRIPTION	DECK SIZE
915190	Briggs & Stratton® Twin 18 hp/656CC	34"
915178	Kohler® 7000 PRO Twin w/Smart Choke 24 hp/725CC	42"
915180	Kohler® 7000 PRO Twin w/Smart Choke 25 hp/725CC	50"

BENEFITS OF STAMPED XLERATOR™ DECK

- Designed using state of the art air flow technology to ensure an exceptional quality of cut regardless of whether you prefer to side discharge, mulch, or bag grass clippings.
- 12-gauge stamped deck design minimizes welds and provides a smooth underside without seams and fewer sharp corners.
- Rounded corners distribute impact stress to reduce the potential for damage if the unit comes in contact with trees, rocks, stumps, curbs or other fixed objects.
- Deck design requires less horsepower to place less stress on the belts and drive system while reserving more power for tough cutting jobs.
- Improved blade overlap reduces striping occurrences for a professional, finished appearance.
- Tunneled cutting area allows for a larger capacity of grass movement towards the discharge opening to reduce clogs.
- Extra-large discharge opening provides improved bagging performance.
- Comes supported by a 5-year limited warranty on the deck shell

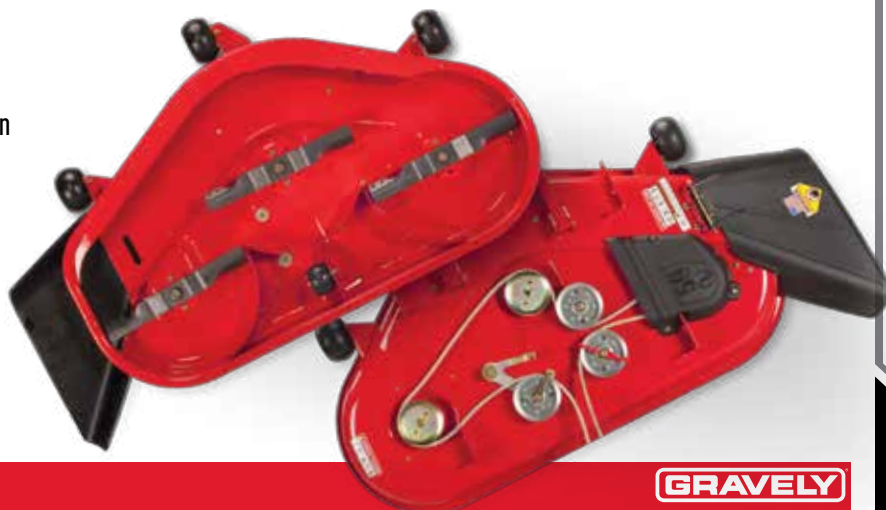**GRAVELY**

Residential Baggers & Accessories

3-Bag Powered Bagger

- 9-Bushel capacity
- Heavy-duty cloth bags
- Grass pump assist
- Available for ZT XL and ZT HD models



Non-Powered Bagger

- 6-Bushel capacity
- Higher air/grass velocity generated by the deck's geometric shape
- Power result without a grass pump assist
- Available for ZT Series models



SCAN TO LEARN
MORE

**RUGGED AND
RELIABLE** BROUGHT
TO YOU BY **GRAVELY**

WATCH. LEARN. MOW.
GO TO » GRAVELY.COM

TO VIEW A FULL LISTING OF
AVAILABLE ATTACHMENTS
AND ACCESSORIES.

Sunshade

Stay cool and protected from the sun during all-day mowing.



Suspension Seat Kit

Improve operator comfort with a suspension kit that's engineered to absorb the shock of rough terrain.



Floor Pan Mat

Reduce vibration in your feet and legs while protecting the floor with a heavy-duty floor pan mat.



Mulch Kit (XLerator™ Deck)

Advanced technology and design combine to foster exceptional air flow that pushes grass clippings back into the lawn for superior mulching results.



Operator Controlled Discharge Chute

Easily control the dispersion of grass clippings directly from the operator position to prevent clippings from being spread across walkways, flowerbeds, and other unwanted areas.



Chrome Wheel Covers

Add a touch of personalized detail to your zero-turn with chrome wheel covers available for both front and rear wheels in 6", 10", and 12" sizes.



48" TOW PLUG AERATOR

- Opens the soil to water, air & nutrients for healthier root growth
- 48" weight tray holds up to 175 lbs for increased soil penetration
- Eight spools of galvanized aerator knives are rustproof and durable
- 10" X 4" pneumatic tires facilitate smooth transportation
- Easy-to-use cantilever transport handle for easy raising and lowering



36" POLY ROLLER

- Can be used for multiple applications from packing down new seed to leveling uneven ground
- Lightweight when empty for easy transport
- Poly construction for rustproof durability
- 18" diameter X 36" wide

Gravely Chore

Specialty Cutters / Debris Collectors

Accomplish pesky tasks with ease and efficiency by utilizing Gravely chore products. Choose from a selection of specialty mowers engineered to overcome challenging mowing conditions and debris collectors to make quick work of tough jobs. Every product is easy to own, easy to operate, and supported by some of the best warranties in the industry. For more information on Gravely's collection of reliable chore equipment visit, www.Gravely.com.

PICTURE PERFECT FINISH



WATCH. LEARN. MOW.
GO TO » GRAVELY.COM

Go online to see:

- Chore equipment
- Product Feature Walk Around Videos
- Side by Side Comparisons
- Chore Reviews

Power Brush

This multi-functional, all-season machine is capable of removing snow up to 6" deep, as well as other debris like sand, dirt and gravel from sidewalks, driveways or decorative surfaces like patio brick or cobblestone. This unit can also be used to dethatch and remove gravel from lawns.

FEATURES

Robust 28- or 36-inch wide brush options

All-season Subaru® engine with electric start for optimized performance in any weather (12V Key Start on Model 926059)

Automatic traction control; enhanced maneuverability and effortless steering

40-degree brush head rotation with operator-controlled pivot lock; easily change brush head direction



CONSUMER



COMMERCIAL - 36"



COMMERCIAL - 28"



CHORE & FINISHING	MODEL #	ALL SEASON SUBARU®	CLEARING WIDTH
HYDRO BRUSH 36	926059	9.5 HP/287 CC	36"
POWER BRUSH 36	926058	9 HP/265 CC	36"
POWER BRUSH 28	921026	6 HP/169 CC	28"

Pro-24™ Brush Cutter

CLEAR WHAT A MOWER CAN'T

Clear tough brush and dense vegetation including tree saplings up to 1.5" in diameter quickly with a Gravelly Pro-24 Brush Cutter.



CHORE & FINISHING	MODEL #	BRIGGS & STRATTON®	CUTTING WIDTH
PRO-24" BRUSH CUTTER	911706	10.5 FT LBS/ 344 CC	24"



FEATURES

10-gauge steel fabricated deck for durability and strength

Self-propelled operation to reduce operator fatigue

Large 20" solid rubber rear tires for stability, maneuverability, and traction

Operator zone throttle control allows for easy start-up and speed adjustments

THE FINISHING
TOUCH BROUGHT TO YOU BY **GRAVELLY**

WATCH. LEARN. MOW.
GO TO **GRAVELLY.COM**

High-Wheel Mower Series

Take control of challenging mowing conditions with a Gravely High-Wheel mower. Commercial-duty components, large wheels, and user-friendly controls make this mower a valuable, long-lasting landscaping solution.

FEATURES

Large 20" rear wheels for maneuverability and traction

Belt-driven deck and wheel reduce the risk of engine damage and maintenance costs

Operator zone throttle control allows for easy start-up and speed adjustments

1" spindle shaft provides strength to tackle tall grass

PRO-24™ HWSP

3 YEAR
limited
WARRANTY

CONSUMER

1 YEAR
limited
WARRANTY

COMMERCIAL

CHORE & FINISHING	MODEL #	BRIGGS & STRATTON® PRO	CUTTING WIDTH
PRO-24™ HWSP	911701	8.5 FT LBS/190 CC	24"

Hurricane® Plus Blower Series

BLOW AWAY THE DEBRIS



Clear leaves and other debris from a variety of surfaces quickly and easily with an all-steel, high-power Hurricane Plus blower. Built with ergonomics in mind, this machine is easy to maneuver and adjust for debris removal without placing stress or strain on the operator.

CHORE & FINISHING	MODEL #	ALL SEASON SUBARU®	FAN DIAMETER
HURRICANE PLUS BLOWER	947108	14 HP/404 CC	18"
HURRICANE PLUS BLOWER	947107	9 HP/265 CC	15.25"
HURRICANE PLUS BLOWER	947106	6 HP/169 CC	13.5"

FEATURES

Subaru® overhead cam engine provides more power with less noise with one-pull startup

Pneumatic tires enhance maneuverability regardless of terrain conditions

Conveniently located remote throttle control

Front and side discharge for control over dispersion and direction of debris

Truck Loader Series

Truck loaders are the ideal cleanup solution for commercial contractors that need to load leaves, grass clippings, cans, plastic bottles, or other bulky debris into a truck.



FEATURES

11-gauge steel construction with 360° rotational discharge chute for easy, efficient unloading

Up to 5.8 gal. fuel capacity depending on the unit

Flexible 8, 10, or 12-inch diameter intake hoses with automatic shutoff and a compacting ratio of 12:1

5-blade impeller on 22 hp model. 4-blade impeller on a 20 and 14 hp models



THE FINISHING
TOUCH BROUGHT TO YOU BY **GRAVELY**

WATCH. LEARN. MOW.
GO TO **GRAVELY.COM**

Vac 35

CHORE & FINISHING	MODEL #	SUBARU®	WIDTH	CFM
VAC-35 LITTER VACUUM	995039	6 HP/169 CC	30"	2000+

Effective on turf or hard surfaces including sidewalks and parking lots, the Vac 35 provides exceptional vacuum power to quickly collect glass, plastic bottles, cans, and other debris.



CONSUMER & COMMERCIAL

FEATURES

Aerodynamic deflector design controls the flow of debris into the bag directing it downward for operator protection

Pneumatic rear tires feature deep cleats mounted on heavy-duty steel rims for superior traction

Rugged, lightweight molded polyethylene housing contains a foam-backed settle liner in critical wear areas for added durability while reducing noise and vibration

Thatch-O-Matic® Power Rake



Primarily used in spring or fall, this easy-to-operate machine quickly and efficiently removes dead grass improving overall lawn health while reducing weeds.



CONSUMER & COMMERCIAL

FEATURES

Optional tine, flail, or knife reels

Clutching mechanism and actuator design are optimized to extend product life

11 height adjustments from 1" to 4" in 1/4" increments

Toe guard, wheel guards, and disengagement brake for operator safety



CHORE & FINISHING	MODEL #	SUBARU®	REEL TYPE	SWEEPING WIDTH
THATCH-O-MATIC	995028	6 HP/169 CC	FLAIL	19"
THATCH-O-MATIC	995045	6 HP/169 CC	TINE	19"

	PRO-TURN 400									
	452	452	460	460	460	460	460	472	472	
MODEL NUMBER	992246	992231	992233	992235	992244	992236	992237	992239	992245	
ENGINE	KAWASAKI® FX850V HEAVY-DUTY AIR CLEANER	KOHLER® EFI HEAVY-DUTY AIR CLEANER	KOHLER® EFI HEAVY-DUTY AIR CLEANER	KAWASAKI® FX921V HEAVY-DUTY AIR CLEANER	KAWASAKI® FX1000V HEAVY-DUTY AIR CLEANER	KUBOTA® DIESEL HEAVY-DUTY AIR CLEANER	KAWASAKI® FX850- LP6 HEAVY-DUTY AIR CLEANER	KAWASAKI® FX921V HEAVY-DUTY AIR CLEANER	KAWASAKI® FX1000V HEAVY-DUTY AIR CLEANER	
HORSEPOWER	27	26.5	26.5	31	35	25	24	31	35	
DISPLACEMENT [cc]	852	747	747	999	999	902	852	999	999	
DRIVE SYSTEM	HYDRO-Gear® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT-5400 INTEGRATED PUMP/MOTOR	
FUEL CAPACITY - GALLONS (LITERS)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	TWIN 33.5# TANKS (TANKS NOT INCLUDED)	13.4 (50.7)	13.4 (50.7)	
GROUND SPEED [APPROX. MPH] [FORWARD/REVERSE]	13 MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH	11MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH	
STARTER	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	
DECK										
DECK MATERIAL	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	
DECK CONSTRUCTION	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	
NUMBER OF SPINDLES	3	3	3	3	3	3	3	3	3	
BLADE TIP SPEED (FPM)	18,000	18,000	18,000	18,000	18,000	18,000	18,000	18,000	18,000	
SPINDLE HOUSING MATERIAL	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	
SPINDLE SHAFT	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	
SPINDLE BEARINGS	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	
DECK DRIVE	BELT	BELT	BELT	BELT	BELT	BELT	BELT	BELT	BELT	
DECK ENGAGEMENT	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	
DECK LIFT SYSTEM	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	
CUTTING WIDTH	52"	52"	60"	60"	60"	60"	60"	72"	72"	
CUTTING HEIGHTS	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	
CUTTING POSITIONS	19	19	19	19	19	19	19	19	19	
WHEELS										
FRONT AXLE	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	
FRONT	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	
REAR	TURF 23 x 10.5-12 RADIAL	TURF 23 x 10.5-12 RADIAL	TURF 24 x 12-12 RADIAL	TURF 24 x 12-12 RADIAL	TURF 24 x 12-12 RADIAL	TURF 24 x 12-12 RADIAL	TURF 24 x 12-12 RADIAL	TURF 24 x 12-12 RADIAL	TURF 24 x 12-12 RADIAL	
FEATURES										
SEAT	AIR RIDE SUSPENSION AND SEAT ISOLATORS	AIR RIDE SUSPENSION AND SEAT ISOLATORS	AIR RIDE SUSPENSION AND SEAT ISOLATORS	AIR RIDE SUSPENSION AND SEAT ISOLATORS	AIR RIDE SUSPENSION AND SEAT ISOLATORS	AIR RIDE SUSPENSION AND SEAT ISOLATORS	AIR RIDE SUSPENSION AND SEAT ISOLATORS	AIR RIDE SUSPENSION AND SEAT ISOLATORS	AIR RIDE SUSPENSION AND SEAT ISOLATORS	
FOOT PLATE	FULLY ISOLATED	FULLY ISOLATED	FULLY ISOLATED	FULLY ISOLATED	FULLY ISOLATED	FULLY ISOLATED	FULLY ISOLATED	FULLY ISOLATED	FULLY ISOLATED	
HOURLY METER	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	
FOLDABLE ROPS	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	
12V POWER PORT	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	
MACHINE DIMENSION										
WEIGHT (LBS) W/O FUEL	1317	1317	1360	1400	1400	1856	1579	1433	14	

		PRO-TURN 200						
	472	472	252	252	260	260	260	272
	992240	992243	992253	992261	992252	992254	992263	992255
	KUBOTA® DIESEL HEAVY-DUTY AIR CLEANER	KAWASAKI® FX850- LPG HEAVY-DUTY AIR CLEANER	KAWASAKI® FX HEAVY-DUTY AIR CLEANER	KOHLER® EFI HEAVY-DUTY AIR CLEANER	KOHLER® ZT740 HEAVY-DUTY AIR CLEANER	KAWASAKI® FX HEAVY-DUTY AIR CLEANER	KOHLER® EFI HEAVY-DUTY AIR CLEANER	KAWASAKI® FX HEAVY-DUTY AIR CLEANER
	25	24	23.5	26.5	25	27	26.5	31
	902	852	726	747	747	852	747	999
	HYDRO-GEAR® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-GEAR® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-GEAR® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-GEAR® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-GEAR® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-GEAR® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-GEAR® ZT-5400 INTEGRATED PUMP/MOTOR	HYDRO-GEAR® ZT-5400 INTEGRATED PUMP/MOTOR
	13.4 (50.7)	TWIN 33.5# TANKS (TANKS NOT INCLUDED)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)
	11MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH	13 MPH/6 MPH
	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT
	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED
	3	3	3	3	3	3	3	3
	18,000	18,000	18,000	18,000	18,000	18,000	18,000	18,000
	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON
	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL
	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING
	BELT	BELT	BELT	BELT	BELT	BELT	BELT	BELT
	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB
	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED
	72"	72"	52"	52"	60"	60"	60"	72"
	1.0-5.5"	1.0-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"
	19	19	17	17	17	17	17	17
	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES
	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	SMOOTH 15 x 6-6 SEMI-PNEUMATIC	SMOOTH 15 x 6-6	SMOOTH 15 x 6-6	SMOOTH 15 x 6-6	SMOOTH 15 x 6-6	SMOOTH 15 x 6-6	SMOOTH 15 x 6-6
	TURF 24 x 12-12 RADIAL	TURF 24 x 12-12 RADIAL	TURF 23 x 10.5-12	TURF 23 x 10.5-12	TURF 24 x 12-12	TURF 24 x 12-12	TURF 24 x 12-12	TURF 24 x 12-12
	AIR RIDE SUSPENSION AND SEAT ISOLATORS	AIR RIDE SUSPENSION AND SEAT ISOLATORS	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION
	FULLY ISOLATED	FULLY ISOLATED	SEMI-ISOLATED	SEMI-ISOLATED	SEMI-ISOLATED	SEMI-ISOLATED	SEMI-ISOLATED	SEMI-ISOLATED
	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
	STANDARD	STANDARD	AVAILABLE	AVAILABLE	AVAILABLE	AVAILABLE	AVAILABLE	AVAILABLE
	1868	1633	1189	1166	1232	1254	1232	1410
	88"	88"	80"	80"	80"	80"	80"	82"
	75"	75"	55.5"	55.5"	63"	63"	63"	75"
	87.25"	87.25"	67.75"	67.75"	75.25"	75.25"	75.25"	87.25"
	70/47.75"	70/47.75"	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75
	3 YEAR LIMITED COMMERCIAL	3 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL
	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME
	3 YEAR LIMITED SPINDLE	3 YEAR LIMITED SPINDLE	3 YEAR LIMITED SPINDLE	3 YEAR LIMITED SPINDLE	3 YEAR LIMITED SPINDLE	3 YEAR LIMITED SPINDLE	3 YEAR LIMITED SPINDLE	3 YEAR LIMITED SPINDLE
			3 BUCKET POWERED BAGGER, DUMP FROM SEAT BAGGER, MULCHING KIT, STRIPING KIT, DISCHARGE COVER KIT, TRAILER HITCH KIT, HEADLIGHT KIT, SOLID FRONT CASTER TIRE KIT, HUB CAP SET, TURF GLIDER SPORT SEAT, ELECTRIC DECK LIFT, OPERATOR CONTROL DISCHARGE CHUTE , RADIAL TIRES, 12V OUTLET					

PRO-TURN 100									
	148	148	148	152	152	152	160	160	160
MODEL NUMBER	991115	991079	991095	991116	991080	991096	991117	991081	991097
ENGINE	KOHLER® ZT730 HEAVY-DUTY AIR CLEANER	KAWASAKI® FX HEAVY-DUTY AIR CLEANER	KOHLER® EFI HEAVY-DUTY AIR CLEANER	KOHLER® ZT730 HEAVY-DUTY AIR CLEANER	KAWASAKI® FX HEAVY-DUTY AIR CLEANER	KOHLER® EFI HEAVY-DUTY AIR CLEANER	KOHLER® ZT740 HEAVY-DUTY AIR CLEANER	KAWASAKI® FX HEAVY-DUTY AIR CLEANER	KOHLER® EFI HEAVY-DUTY AIR CLEANER
HORSEPOWER	23	22	23	23	22	23	25	23.5	25
DISPLACEMENT (cc)	725	726	680	725	726	680	747	726	730
DRIVE SYSTEM	HYDRO-Gear® ZT- 3400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT- 3400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT- 3400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT- 3400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT- 3400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT- 3400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT- 3400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT- 3400 INTEGRATED PUMP/MOTOR	HYDRO-Gear® ZT- 3400 INTEGRATED PUMP/MOTOR
FUEL CAPACITY - GALLONS (LITERS)	9.4(35.6)	9.4(35.6)	9.4(35.6)	9.4(35.6)	9.4(35.6)	9.4(35.6)	9.4(35.6)	9.4(35.6)	9.4(35.6)
GROUND SPEED [APPROX. MPH FORWARD/REVERSE]	10 MPH/5 MPH	10 MPH/5 MPH	10 MPH/5 MPH	10 MPH/5 MPH	10 MPH/5 MPH	10 MPH/5 MPH	10 MPH/5 MPH	10 MPH/5 MPH	10 MPH/5 MPH
STARTER	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
DECK									
DECK MATERIAL	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT
DECK CONSTRUCTION	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED
NUMBER OF SPINDLES	3	3	3	3	3	3	3	3	3
BLADE TIP SPEED (FPM)	18,000	18,000	18,000	18,000	18,000	18,000	18,000	18,000	18,000
SPINDLE HOUSING MATERIAL	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON
SPINDLE SHAFT	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL
SPINDLE BEARINGS	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING
DECK DRIVE	BELT	BELT	BELT	BELT	BELT	BELT	BELT	BELT	BELT
DECK ENGAGEMENT	OGURA® GT2.5 ELECTRIC CLUTCH	OGURA® GT2.5 ELECTRIC CLUTCH	OGURA® GT2.5 ELECTRIC CLUTCH	OGURA® GT2.5 ELECTRIC CLUTCH	OGURA® GT2.5 ELECTRIC CLUTCH	OGURA® GT2.5 ELECTRIC CLUTCH	OGURA® GT2.5 ELECTRIC CLUTCH	OGURA® GT2.5 ELECTRIC CLUTCH	OGURA® GT2.5 ELECTRIC CLUTCH
DECK LIFT SYSTEM	ADJ FOOT OPERATED	ADJ FOOT OPERATED	ADJ FOOT OPERATED	ADJ FOOT OPERATED	ADJ FOOT OPERATED	ADJ FOOT OPERATED	ADJ FOOT OPERATED	ADJ FOOT OPERATED	ADJ FOOT OPERATED
CUTTING WIDTH	48"	48"	48"	52"	52"	52"	60"	60"	60"
CUTTING HEIGHT	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"
CUTTING POSITIONS	17	17	17	17	17	17	17	17	17
WHEELS									
FRONT AXLE	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES
FRONT	SMOOTH 13x6.50-6	SMOOTH 13x6.50-6	SMOOTH 13x6.50-6	SMOOTH 13x6.50-6	SMOOTH 13x6.50-6	SMOOTH 13x6.50-6	SMOOTH 13x6.50-6	SMOOTH 13x6.50-6	SMOOTH 13x6.50-6
REAR	TURF 23 x 10.50-12	TURF 23 x 10.50-12	TURF 23 x 10.50-12	TURF 23 x 10.50-12	TURF 23 x 10.50-12	TURF 23 x 10.50-12	TURF 23 x 10.50-12	TURF 23 x 10.50-12	TURF 23 x 10.50-12
FEATURES									
SEAT	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION
HOOD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
HOURLY METER w/ MAINTENANCE REMINDER	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
SUSPENSION SEAT w/PAD ARMREST	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
FOLDABLE ROPS	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
MACHINE DIMENSION									
WEIGHT (LBS) w/O FUEL	1026	1026	1039	1051	1051	1064	1073	1073	1086
LENGTH	78.6"	78.6"	78.6"	78.6"	78.6"	78.6"	78.6"	78.6"	78.6"
WIDTH WITHOUT CHUTE	50"	50"	50"	55.5"	55.5"	55.5"	55.5"	63"	55.5"
WIDTH WITH CHUTE	62.25"	62.25"	62.25"	67.75"	67.75"	67.75"	75.25"	75.25"	75.25"

PRO-TURN				
48	52	52	60	60
991200	991201	991208	991202	991203
KAWASAKI® FS691 V-TWIN	KAWASAKI® FS691 V-TWIN	BRIGGS & STRATTON® COMMERCIAL TURF CYCLONIC AIR CLEANER	KAWASAKI® FS730 V-TWIN	BRIGGS & STRATTON® COMMERCIAL TURF CYCLONIC AIR CLEANER
23	23	23	24	25
691	691	724	730	724
HYDRO-Gear® ZT-3200 TRANSAXLES	HYDRO-Gear® ZT-3200 TRANSAXLES	HYDRO-Gear® ZT-3200 TRANSAXLES	HYDRO-Gear® ZT-3200 TRANSAXLES	HYDRO-Gear® ZT-3200 TRANSAXLES
6.0(22.7)	6.0(22.7)	6.0(22.7)	6.0(22.7)	6.0(22.7)
9 MPH/5 MPH	9 MPH/5 MPH	9 MPH/5 MPH	9 MPH/5 MPH	9 MPH/5 MPH
ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT
WELDED	WELDED	WELDED	WELDED	WELDED
3	3	3	3	3
18,000	18,000	18,000	18,000	18,000
CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON
STEEL	STEEL	STEEL	STEEL	STEEL
BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING
BELT	BELT	BELT	BELT	BELT
ELECTRIC OGURA® GT1A	ELECTRIC OGURA® GT1A	ELECTRIC OGURA® GT1A	ELECTRIC OGURA® GT1A	ELECTRIC OGURA® GT1A
ADJ FOOT OPERATED	ADJ FOOT OPERATED	ADJ FOOT OPERATED	ADJ FOOT OPERATED	ADJ FOOT OPERATED
48"	52"	52"	60"	60"
1.0"-5.0"	1.0"-5.0"	1.0"-5.0"	1.0"-5.0"	1.0"-5.0"
15	15	15	15	15
FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES	FIXED WITH GREASEABLE CASTER FORK TUBES
SMOOTH 13x6.5-6	SMOOTH 13x6.5-6	SMOOTH 13x6.5-6	SMOOTH 13x6.5-6	SMOOTH 13x6.5-6
TURF 22 x 10-10	TURF 22 x 10-10	TURF 22 x 10-10	TURF 22 x 10-10	TURF 22 x 10-10
HIGH BACK COMFORT w/ INTEGRATED SUSPENSION	HIGH BACK COMFORT w/ INTEGRATED SUSPENSION	HIGH BACK COMFORT w/ INTEGRATED SUSPENSION	HIGH BACK COMFORT w/ INTEGRATED SUSPENSION	HIGH BACK COMFORT w/ INTEGRATED SUSPENSION
N/A	N/A	N/A	N/A	N/A
STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
N/A	N/A	N/A	N/A	N/A
STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
918	936	936	963	959
78.5"	78.5"	78.5"	78.5"	78.5"
50"	55.5"	55.5"	63"	63"
62.25"	67.75"	67.75"	75.25"	75.25"
68"/48.5"	68"/48.5"	68"/48.5"	68"/48.5"	68"/48.5"
6"	6"	6"	6.25"	
2 YEAR/600 HOUR LIMITED COMMERCIAL	2 YEAR/600 HOUR LIMITED COMMERCIAL	2 YEAR/600 HOUR LIMITED COMMERCIAL	2 YEAR/600 HOUR LIMITED COMMERCIAL	2 YEAR/600 HOUR LIMITED COMMERCIAL
N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A
2 BUCKET POWERED BAGGER, MULCHING KIT, TRAILER HITCH KIT, OPERATOR CONTROL DISCHARGE CHUTE, DISCHARGE COVER KIT, VACUUM BAFFLE, SUNSHADE, STRIPING KIT, HEADLIGHT KIT, FLEXTEND SHOULDER SUPPORT SYSTEM, HUB CAP KIT				

PRO-MASTER	
260H	260H RD
992217	992219
KAWASAKI® FX HEAVY-DUTY AIR CLEANER	KAWASAKI® FX HEAVY-DUTY AIR CLEANER
27	27
852	852
HYDRO-Gear(R) 21CC PUMP WITH PARKER(R) 18 C.I. WHEEL MOTORS	HYDROSTATIC HYDRO-Gear® 21CC PUMP WITH PARKER® 18 C.I. WHEEL MOTORS
13.4 (50.7)	13.4 (50.7)
13 MPH/6 MPH	13 MPH/6 MPH
ELECTRIC	ELECTRIC
7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT
WELDED	WELDED
3	3
18,000	18,000
CAST IRON	CAST IRON
STEEL	STEEL
BALL BEARING	BALL BEARING
BELT	BELT
OGURA® GT3.5 250 FT/LB	OGURA® GT3.5 250 FT/LB
HYDRAULIC	HYDRAULIC
60"	60"
1"-5"	1"-5"
INFINITE	INFINITE
PIVOTING/LOCKING w/ GREASEABLE CASTER FORK TUBES	PIVOTING/LOCKING w/ GREASEABLE CASTER FORK TUBES
SMOOTH 15 x 6-6	SMOOTH 15 x 6-6
TURF 24 x 11.5-12	TURF 24 x 11.5-12
HIGH BACK w/ FULL SUSPENSION	HIGH BACK w/ FULL SUSPENSION
STANDARD	STANDARD
STANDARD	STANDARD
STANDARD	STANDARD
STANDARD	STANDARD
1333	1370
82"	82"
63"	63"
75.25"	75.25"
72/48"	72/48"
8.12	8.12
2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL
LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME
3 YEAR LIMITED SPINDLE	3 YEAR LIMITED SPINDLE
*3 BUCKET POWERED BAGGER, *HOPPER STYLE BAGGER, *MULCHING KIT, *STRIPING KIT, *DISCHARGE COVER KIT, TRAILER HITCH KIT, HEADLIGHT KIT, BAR STYLE TIRE KIT, SNOW BLADE, SNOW HEAD, RAD QUICK HITCH, DEBRIS BLOWER, SWEEPER BROOM, SOLID FRONT CASTER TIRE KIT, TURF GLIDER SPORT SEAT, LIFTMASTER KIT, HUB CAPS, FLEXTEND SHOULDER SUPPORT SYSTEM, *VACUUM BAFFLE KIT, *OC CHUTE BAFFLE KIT, SUNSHADE [*N/A ON #992219]	

	COMPACT PRO	
	34	44
MODEL NUMBER	991088	991089
ENGINE	KAWASAKI® FX HEAVY-DUTY AIR CLEANER	KAWASAKI® FX HEAVY-DUTY AIR CLEANER
HORSEPOWER	15.5	19
DISPLACEMENT (cc)	603	603
DRIVE SYSTEM	HYDROSTATIC HYDRO-GEAR® 10cc PUMPS WITH HYDRO-GEAR® 12P WHEEL MOTORS	HYDRO-GEAR® ZT-3100 TRANSAXLES
FUEL CAPACITY - GALLONS (LITERS)	7.3(27.6)	9.4(35.6)
GROUND SPEED [APPROX. MPH] (FORWARD/REVERSE)	9 MPH/4.5 MPH	8 MPH/4 MPH
STARTER	ELECTRIC	ELECTRIC
DECK		
DECK MATERIAL	7 GA STEEL WITH 7 GA (.179") SPINDLE REINFORCEMENT	7 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT
DECK CONSTRUCTION	WELDED	WELDED
NUMBER OF SPINDLES	2	3
BLADE TIP SPEED (FPM)	18,000	18,000
SPINDLE HOUSING MATERIAL	CAST IRON	CAST IRON
SPINDLE SHAFT	STEEL	STEEL
SPINDLE BEARINGS	BALL BEARING	BALL BEARING
DECK DRIVE	BELT	BELT
DECK ENGAGEMENT	ELECTRIC OGURA® GT1A	ELECTRIC OGURA® GT1A
DECK LIFT SYSTEM	FOOT OPERATED	FOOT OPERATED
CUTTING WIDTH	34"	44"
CUTTING HEIGHTS	1"-5"	1"-5"
CUTTING POSITIONS	9	9
WHEELS		
FRONT AXLE	FIXED	FIXED
FRONT	13x5-6 SMOOTH	13x5-6 SMOOTH
REAR	21x7-10 TURF	20x10-10 TURF
FEATURES		
SEAT	HIGH BACK w/ SEAT SPRINGS	HIGH BACK w/ SEAT SPRINGS
HOOD	N/A	N/A
HEADLIGHTS	N/A	N/A
HOURLY METER	STANDARD	STANDARD
FOLDABLE ROPS	N/A	N/A
DIMENSIONS		
WEIGHT (LBS.)	725	800
LENGTH (INCHES)	71.5	71.5
WIDTH w/OUT CHUTE (INCHES)	35.4"	46.8"
HEIGHT w/ ROPS EXT/DOWN (INCHES)	42	42
WARRANTY		
UNIT	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL
DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME
SPINDLES	3 YEAR LIMITED SPINDLE	3 YEAR LIMITED SPINDLE
ATTACHMENTS/ACCESSORIES		
	BAGGER KIT, MULCHING KIT, STRIPING KIT, DISCHARGE COVER KIT, HEADLIGHT KIT, FLEXTEND SHOULDER SUPPORT SYSTEM, SUSPENSION SEAT KIT	

HD					
ZT HD 44	ZT HD 48	ZT HD 48	ZT HD 52	ZT HD 52	ZT HD 60
99110700	99108200	99110800	99108300	99110900	99108400
KOHLER® 7000 PRO TWIN WITH SMART CHOKE	KAWASAKI® FR TWIN	KOHLER® 7000 PRO TWIN WITH SMART CHOKE	KAWASAKI® FR TWIN	KOHLER® 7000 PRO TWIN WITH SMART CHOKE	KAWASAKI® FR TWIN
24	23	25	23	25	24
725	726	725	726	725	726
HYDRO-GEAR® ZT-3100 TRANSAXLES	HYDRO-GEAR® ZT-3100 TRANSAXLES	HYDRO-GEAR® ZT-3100 TRANSAXLES	HYDRO-GEAR® ZT-3100 TRANSAXLES	HYDRO-GEAR® ZT-3100 TRANSAXLES	HYDRO-GEAR® ZT-3100 TRANSAXLES
6.0(22.7)	6.0(22.7)	6.0(22.7)	6.0(22.7)	6.0(22.7)	6.0(22.7)
8 MPH/4 MPH	8 MPH/4 MPH	8 MPH/4 MPH	8 MPH/4 MPH	8 MPH/4 MPH	8 MPH/4 MPH
ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
DECK					
10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT
WELDED	WELDED	WELDED	WELDED	WELDED	WELDED
3	3	3	3	3	3
18,000	18,000	18,000	18,000	18,000	18,000
CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON	CAST IRON
STEEL	STEEL	STEEL	STEEL	STEEL	STEEL
BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING	BALL BEARING
BELT	BELT	BELT	BELT	BELT	BELT
ELECTRIC OGURA® GT1A	ELECTRIC OGURA® GT1A	ELECTRIC OGURA® GT1A	ELECTRIC OGURA® GT1A	ELECTRIC OGURA® GT1A	ELECTRIC OGURA® GT1A
FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED
44"	48"	48"	52"	52"	60"
1"-5"	1"-5"	1"-5"	1"-5"	1"-5"	1"-5"
9	9	9	9	9	9
WHEELS					
FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
13x5-6 SMOOTH	13x5-6 SMOOTH	13x5-6 SMOOTH	13x5-6 SMOOTH	13x5-6 SMOOTH	13x5-6 SMOOTH
20x10-10 TURF	20x10-10 TURF	20x10-10 TURF	20x10-10 TURF	20x10-10 TURF	20x10-10 TURF
FEATURES					
PLUSH HIGH BACK WITH SEAT SPRINGS, LEVER ADJUST, PADDED ARM RESTS	PLUSH HIGH BACK WITH SEAT SPRINGS, LEVER ADJUST, PADDED ARM RESTS	PLUSH HIGH BACK WITH SEAT SPRINGS, LEVER ADJUST, PADDED ARM RESTS	PLUSH HIGH BACK WITH SEAT SPRINGS, LEVER ADJUST, PADDED ARM RESTS	PLUSH HIGH BACK WITH SEAT SPRINGS, LEVER ADJUST, PADDED ARM RESTS	PLUSH HIGH BACK WITH SEAT SPRINGS, LEVER ADJUST, PADDED ARM RESTS
WARRANTY					
3 YEAR LIMITED CONSUMER	3 YEAR LIMITED CONSUMER	3 YEAR LIMITED CONSUMER	3 YEAR LIMITED CONSUMER	3 YEAR LIMITED CONSUMER	3 YEAR LIMITED CONSUMER
5 YEAR LIMITED DECK SHELL & FRAME	5 YEAR LIMITED DECK SHELL & FRAME	3 YEAR LIMITED CONSUMER	5 YEAR LIMITED DECK SHELL & FRAME	3 YEAR LIMITED CONSUMER	5 YEAR LIMITED DECK SHELL & FRAME
DIMENSIONS					
800	823	823	832	832	853
71.5	71.5	74.5	74.5	74.5	74.5
46.8 (w/o CHUTE)	50 (w/o CHUTE)	50 (w/o CHUTE)	55 (w/o CHUTE)	55 (w/o CHUTE)	62.8 (w/o CHUTE)
42	42	42	42	42	42
ATTACHMENTS & ACCESSORIES					
	BAGGER KIT, MULCHING KIT, STRIPER KIT, DISCHARGE COVER KIT, TRAILER HITCH KIT, HEADLIGHT KIT, SPREADER CART, ROLLER, AERATOR, DETH				

XL			
ZT HD 60	ZT XL 42	ZT XL 48	ZT XL 54
99111000	91518400	91518600	91518800
KOHLER® 7000 PRO TWIN WITH SMART CHOKE	KOHLER® 7000 PRO TWIN WITH SMART CHOKE	KOHLER® 7000 PRO TWIN WITH SMART CHOKE	KOHLER® 7000 PRO TWIN WITH SMART CHOKE
26	24	25	25
747	725	725	725
HYDRO-GEAR® ZT-3100 TRANSAXLES	HYDRO-GEAR® ZT-2800 TRANSAXLES	HYDRO-GEAR® ZT-2800 TRANSAXLES	HYDRO-GEAR® ZT-2800 TRANSAXLES
6.0(22.7)	3.8 [14.4]	3.8 [14.4]	3.8 [14.4]
8 MPH/4 MPH	6.5 MPH/3 MPH	6.5 MPH/3 MPH	6.5 MPH/3 MPH
ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
10 GA STEEL WITH .25 INCH SPINDLE REINFORCEMENT	10 GA WITH DOUBLER PLATE	10 GA WITH DOUBLER PLATE	10 GA WITH DOUBLER PLATE
WELDED	WELDED	WELDED	WELDED
3	3	3	3
18,000	17,000	16,800	16,950
CAST IRON	ALUMINUM	ALUMINUM	ALUMINUM
STEEL	1" DIA. STEEL	1" DIA. STEEL	1" DIA. STEEL
BALL BEARING	1" SEALED	1" SEALED	1" SEALED
BELT	BELT	BELT	BELT
ELECTRIC OGURA® GT1A	ELECTRIC WARNER®	ELECTRIC WARNER®	ELECTRIC WARNER®
FOOT OPERATED	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED
60"	42"	48"	54"
1"-5"	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"
9	7	7	7
FIXED	FIXED	FIXED	FIXED
13x5-6 SMOOTH	11 x 4	11 x 4	11 x 4
20x10-10 TURF	20x 8	20 x 10	20 x 10
PUSH HIGH BACK WITH SEAT SPRINGS, LEVER ADJUST, PADDED ARM RESTS	HIGH BACK WITH SEAT SPRINGS, LEVER ADJUST, ARM RESTS	HIGH BACK WITH SEAT SPRINGS, LEVER ADJUST, ARM RESTS	HIGH BACK WITH SEAT SPRINGS, LEVER ADJUST, ARM RESTS
3 YEAR LIMITED CONSUMER	3 YEAR LIMITED CONSUMER	3 YEAR LIMITED CONSUMER	3 YEAR LIMITED CONSUMER
3 YEAR LIMITED CONSUMER	5 YEAR LIMITED DECK SHELL & FRAME	5 YEAR LIMITED DECK SHELL & FRAME	5 YEAR LIMITED DECK SHELL & FRAME
853	615	630	645
74.5	69"	69"	69"
62.8 [w/o CHUTE]	52"	58"	64"
42	42"	42"	42"
DETHATCHER, SPRAYER	BAGGER KIT, MULCHING KIT, TRAILER HITCH KIT, HEADLIGHT KIT, SUNSHADE, SPREADER CART, SNOW BLADE, SNOW HEADER ROLLER, AERATOR, DETHATCHER, SPRAYER		

ZT		
ZT34	ZT42	ZT50
915146	915148	915150
BRIGGS & STRATTON® TWIN CYLINDER	KOHLER® 7000 PRO TWIN W/SMART CHOKE	KOHLER 7000 PRO TWIN W/SMART CHOKE
18	21.5	23
656	725	725
HYDRO-GEAR® EZT TRANSAXLES WITH 1" AXLE SHAFTS	HYDRO-GEAR® EZT TRANSAXLES WITH 1" AXLE SHAFTS	HYDRO-GEAR® EZT TRANSAXLES WITH 1" AXLE SHAFTS
2.0 (7.5)	2.0 (7.5)	2.0 (7.5)
6 MPH/3 MPH	6 MPH/3 MPH	6 MPH/3 MPH
ELECTRIC	ELECTRIC	ELECTRIC
12 GA	12 GA	12 GA
STAMPED	STAMPED	STAMPED
2	3	3
17,500	17,000	17,800
STEEL	STEEL	STEEL
STEEL	STEEL	STEEL
SEALED	SEALED	SEALED
BELT	BELT	BELT
ELECTRIC WARNER®	ELECTRIC WARNER®	ELECTRIC WARNER®
FOOT OPERATED	FOOT OPERATED	FOOT OPERATED
34"	42"	50"
1.5"-4.5"	1.5"-4.5"	1.5"-4.5"
7	7	7
FIXED	FIXED	FIXED
11 x 4	11 x 4	11 x 4
18 x 6.5-8	18 x 8.5-8	18 x 9.5-8
LOW BACK W/ SEAT SPRINGS	HIGH BACK WITH SEAT SPRINGS & LEVER ADJUST	HIGH BACK WITH SEAT SPRINGS & LEVER ADJUST
3 YEAR LIMITED CONSUMER	3 YEAR LIMITED CONSUMER	3 YEAR LIMITED CONSUMER
5 YEAR LIMITED DECK SHELL & FRAME	5 YEAR LIMITED DECK SHELL & FRAME	5 YEAR LIMITED DECK SHELL & FRAME
425	440	475
64"	64"	64"
42"	54"	62"
37"	37"	40"
BAGGER KIT, MULCHING KIT, TRAILER HITCH KIT, SUNSHADE, SPREADER CART, ROLLER, AERATOR, DETHATCHER, SPRAYER		

COMMERCIAL 21		
	ZONE	BBC
MODEL NUMBERS	911282	911290
ENGINE	KAWASAKI® FJ180V KAI	KAWASAKI® FJ180V KAI
HORSEPOWER	6 HP	6 HP
DISPLACEMENT	179 CC	179 CC
DRIVE SYSTEM	3 SPEED GEAR DRIVE	3 SPEED GEAR DRIVE
FUEL CAPACITY - GAL	0.48 (1.8L)	0.48 (1.8L)
GROUND SPEED [APPROX. MPH]	4.1	4.1
STARTER	RECOIL	RECOIL
DECK		
DECK MATERIAL	ALUMINUM	ALUMINUM
DECK CONSTRUCTION	CAST	CAST
NUMBER OF BLADES	1	1
BLADE TIP SPEED (FPM)	18,500	18,500
DECK DRIVE	DIRECT	DIRECT
DECK ENGAGEMENT	BALE	LEVER
DECK LIFT SYSTEM	FOUR POINT	FOUR POINT
CUTTING WIDTH	21	21
CUTTING HEIGHTS	1" - 4"	1" - 4"
CUTTING POSITION	7	7
WHEELS		
FRONT AXLE	STRAIGHT	STRAIGHT
FRONT	9"	9"
REAR	9"	9"
DIMENSIONS		
WEIGHT (LBS.)	131	136
LENGTH	63	63
WIDTH	22.5	22.5
HEIGHT	45	45
WARRANTY		
UNIT	1 YEAR COMMERCIAL/ 3 YEAR CONSUMER	
ATTACHMENTS/ACCESSORIES		
BAGGER KIT	STANDARD	STANDARD
MULCHING KIT	STANDARD	STANDARD

	PRO-WALK								
	36HR PG	48HE PG	52HE PG	61HE-PG	36HR PS	48HE PS	52HE PS	61HE PS	48HE PG
MODEL NUMBER	98815300	98815400	98815500	98816900	98815600	98815700	98815800	98815900	98817000
ENGINE	KAWASAKI® FS481V	KAWASAKI® FS600V	KAWASAKI® FS600V	KAWASAKI® FS691V	KAWASAKI® FS481V	KAWASAKI® FS600V	KAWASAKI® FS600V	KAWASAKI® FS691V	KOHLER® PCV680 EFI LP
HORSEPOWER	14.5	18.5	18.5	23	14.5	18.5	18.5	23	22
DISPLACEMENT (cc)	603	603	603	726	603	603	603	726	747
DRIVE SYSTEM	10cc PUMPS AND 12ci MOTORS	10cc PUMPS AND 12ci MOTORS	10cc PUMPS AND 12ci MOTORS	10cc PUMPS AND 12ci MOTORS	10cc PUMPS AND 12ci MOTORS	10cc PUMPS AND 12ci MOTORS	10cc PUMPS AND 12ci MOTORS	10cc PUMPS AND 12ci MOTORS	10cc PUMPS AND 12ci MOTORS
FUEL CAPACITY GALLONS (LITERS)	5.8 GALLON (22 L)	5.8 GALLON (22 L)	5.8 GALLON (22 L)	5.8 GALLON (22 L)	5.8 GALLON (22 L)	5.8 GALLON (22 L)	5.8 GALLON (22 L)	5.8 GALLON (22 L)	20 LB OR 33.5LB LP TANK (NOT INCLUDED)
GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	7 MPH / 3 MPH	7 MPH / 3 MPH	7 MPH / 3 MPH	7 MPH / 3 MPH	7 MPH / 3 MPH	7 MPH / 3 MPH	7 MPH / 3 MPH	7 MPH / 3 MPH	7 MPH / 3 MPH
STARTER	RECOIL	ELECTRIC	ELECTRIC	ELECTRIC	RECOIL	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
DECK									
DECK MATERIAL	7 GA	7 GA	7 GA	7 GA	7 GA	7 GA	7 GA	7 GA	7 GA
DECK CONSTRUCTION	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED	WELDED
NUMBER OF SPINDLES	2	3	3	3	2	3	3	3	3
BLADE TIP SPEED (FPM)	18,261	18,220	18,246	18,246	18,261	18,220	18,246	18,246	18,220
SPINDLE HOUSING MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM
SPINDLE SHAFT	1" STEEL	1" STEEL	1" STEEL	1" STEEL	1" STEEL	1" STEEL	1" STEEL	1" STEEL	1" STEEL
SPINDLE BEARINGS	1" SEALED	1" SEALED	1" SEALED	1" SEALED	1" SEALED	1" SEALED	1" SEALED	1" SEALED	1" SEALED
DECK DRIVE	BELT	BELT	BELT	BELT	BELT	BELT	BELT	BELT	BELT
DECK ENGAGEMENT	ELECTRIC CLUTCH	ELECTRIC CLUTCH	ELECTRIC CLUTCH	ELECTRIC CLUTCH	ELECTRIC CLUTCH	ELECTRIC CLUTCH	ELECTRIC CLUTCH	ELECTRIC CLUTCH	ELECTRIC CLUTCH
DECK LIFT SYSTEM	MANUAL	MANUAL	MANUAL	MANUAL	MANUAL	MANUAL	MANUAL	MANUAL	MANUAL
CUTTING WIDTH	36"	48"	52"	61"	36"	48"	52"	61"	48"
CUTTING HEIGHTS	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"
CUTTING POSITIONS	15	15	15	15	15	15	15	15	15
WHEELS									
FRONT AXLE	SWIVEL	SWIVEL	SWIVEL	SWIVEL	SWIVEL	SWIVEL	SWIVEL	SWIVEL	SWIVEL
FRONT	9 x 3.5	9 x 3.5	9 x 3.5	9 x 3.5	9 x 3.5	9 x 3.5	9 x 3.5	9 x 3.5	9 x 3.5
REAR	16 x 6.5	16 x 7.5	16 x 7.5	18 x 8.5	16 x 6.5	16 x 7.5	16 x 7.5	18 x 8.5	16 x 7.5
MACHINE DIMENSION									
WEIGHT (LBS.)	570	707	728	806	558	662	686	764	765 w/ FULL 33.5# LP TANK
LENGTH (INCHES)	75.5"	72"	74"	69"	72"	66"	69"	69"	72"
WIDTH (INCHES)	37"	48.5"	52.5"	61.5"	37"	48.5"	52.5"	61.5"	48.5"
HEIGHT (INCHES)	44.5"	44.5"	44.5"	43"	43"	43"	43"	43"	44.5"
WARRANTY									
UNIT	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL
DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME
SPINDLES	2 YEAR LIMITED SPINDLE	2 YEAR LIMITED SPINDLE	2 YEAR LIMITED SPINDLE	2 YEAR LIMITED SPINDLE	2 YEAR LIMITED SPINDLE	2 YEAR LIMITED SPINDLE	2 YEAR LIMITED SPINDLE	2 YEAR LIMITED SPINDLE	2 YEAR LIMITED SPINDLE
ATTACHMENTS/ACCESSORIES									
	TWO-WHEEL SULKY, ONE-WHEEL SULKY, GRASS COLLECTOR, OPERATOR CONTROLLED DISCHARGE CHUTE, GRASS COLLECTOR ATTACHMENT BRACKET								

PRO-WALK GEAR				HIGH WHEEL MOWER
PRODUCT NAME	32GR	36GR	48GR	PRO-24 HWSP
MODEL NUMBER	98815000	98815100	98815200	911701
ENGINE	KAWASAKI® FS481V	KAWASAKI® FS481V	KAWASAKI® FS481V	BRIGGS & STRATTON®
HORSEPOWER	14.5	14.5	14.5	8.5 FT LBS
DISPLACEMENT (cc)	603	603	603	190
DRIVE SYSTEM	PEERLESS GEAR DRIVE	PEERLESS GEAR DRIVE	PEERLESS GEAR DRIVE	VARIABLE SPEED BELT DRIVE
FUEL CAPACITY - GALLONS [LITERS]	5.8 GALLON [22 L]	5.8 GALLON [22 L]	5.8 GALLON [22 L]	0.3 [1.1 L]
GROUND SPEED [APPROX. MPH] (FORWARD/REVERSE)	5.4 MPH / REVERSE ASSIST	5.4 MPH / REVERSE ASSIST	5.4 MPH / REVERSE ASSIST	4.7 MPH
STARTER	RECOIL	RECOIL	RECOIL	RECOIL
DECK				
DECK MATERIAL	7 GA	7 GA	7 GA	11 GA STEEL
DECK CONSTRUCTION	WELDED	WELDED	WELDED	STAMPED
NUMBER OF SPINDLES	2	2	3	1
BLADE TIP SPEED (FPM)	18,500	18,152	18,500	15,400
SPINDLE HOUSING MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM	STEEL
SPINDLE SHAFT	1" STEEL	1" STEEL	1" STEEL	1"
SPINDLE BEARINGS	1" SEALED	1" SEALED	1" SEALED	SEALED BALL
DECK DRIVE	BELT	BELT	BELT	BELT
DECK ENGAGEMENT	ELECTRIC CLUTCH	ELECTRIC CLUTCH	ELECTRIC CLUTCH	DIRECT TO ENGINE
DECK LIFT SYSTEM	MANUAL	MANUAL	MANUAL	MANUAL
CUTTING WIDTH	32"	36"	48"	24"
CUTTING HEIGHTS	1.5" - 4.5"	1.5" - 4.5"	1.5" - 4.5"	2" - 4"
CUTTING POSITIONS	13	13	13	4
WHEELS				
FRONT AXLE	SWIVEL	SWIVEL	SWIVEL	FIXED
FRONT	9 x 3.50	9 x 3.50	9 x 3.50	8
REAR	13 x 5	13 x 6.5	13 x 6.5	20
MACHINE DIMENSION				
WEIGHT (LBS.)	504	504	572	152
LENGTH (INCHES)	77"	77"	77"	60"
WIDTH (INCHES)	45.7"	48.4"	60.8"	34.5"
HEIGHT (INCHES)	41.9"	41.9"	41.9"	39"
WARRANTY				
UNIT	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	2 YEAR LIMITED COMMERCIAL	3 YEAR LIMITED CONSUMER, 1 YEAR COMMERCIAL
DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	LIMITED LIFETIME DECK SHELL & FRAME	
SPINDLES	2 YEAR LIMITED SPINDLE	2 YEAR LIMITED SPINDLE	2 YEAR LIMITED SPINDLE	
ATTACHMENTS/ACCESSORIES				
	MULCHING KIT, GRASS COLLECTOR, BAGGER ATTACHMENT BRACKET			24" MULCH KIT, FRONT SWIVEL WHEEL KIT, 20" HIGH TRACTION REAR WHEEL KIT, HANDGUARD KIT

	BRUSH CUTTER
	PRO-24™
MODEL NUMBER	911706
ENGINE	
MANUFACTURER	BRIGGS & STRATTON
HORSEPOWER/DISPLACEMENT	10.5 FT LBS/344 CC
STARTING SYSTEM	RECOIL
FUEL CAPACITY	0.7 GAL [2.6 L]
DRIVE SYSTEM	VARIABLE SPEED BELT DRIVE
GROUND SPEED	4.7 MPH
CUTTING WIDTH	24" [60.9cm]
CUTTING HEIGHT	3.3" [8.4 cm]
CUTTING POSITIONS	1
DECK MATERIAL	10 GA STEEL
DECK CONSTRUCTION	FABRICATED
DECK DRIVE	CLUTCHING BELT
NUMBER OF SPINDLES	1
BLADE TIP SPEED (FPM)	16,100
SPINDLE MATERIAL	STEEL
SPINDLE SHAFT	1" [2.5 cm]
SPINDLE BEARINGS	SEALED BALL
WHEELS	
REAR	20" [50.8 cm]
DIMENSIONS	
LENGTH (IN.)	69" [175.3 cm]
WIDTH (IN.)	28" [71.1 cm]
HEIGHT (IN.)	45" [114.3 cm]
DRY WEIGHT (LBS.)	220 [99.8 KG]
ACCESSORIES/ATTACHMENTS	
N/A	
WARRANTY	
3 YEAR LIMITED CONSUMER, 1 YEAR LIMITED COMMERCIAL	

VAC 35	
	VAC-35
MODEL NUMBER	995039
ENGINE	
MANUFACTURER	SUBARU[R]
HORSEPOWER/DISPLACEMENT	6 HP/169 CC
STARTING SYSTEM	RECOIL
FUEL CAPACITY	0.9 GAL [3.4 L]
KEY FEATURES	
DRIVE SYSTEM	PUSH
INTAKE	30" [76.2 cm]
FAN HOUSING	HIGH IMPACT MOLDED ABS
IMPELLER	ALUMINUM/MAGNESIUM ALLOY, 5-BLADE
CFM	2000 +
DEBRIS REDUCTION RATIO	8:1
DEBRIS DEFLECTOR	STANDARD
HANDLE	1" TUBULAR STEEL WITH SOFT GRIP
COLLECTION BAG	POLY FELT
COLLECTION CAPACITY	9 CU FT
WHEELS	
FRONT	N/A
REAR	15" X 4" PNEUMATIC
DIMENSIONS	
LENGTH (IN.)	80" [203.2 cm]
WIDTH (IN.)	30" [76.2 cm]
HEIGHT (IN.)	41" [104.1 cm]
DRY WEIGHT (LBS.)	140 [63.5 kg]
ACCESSORIES / ATTACHMENTS	
	POLY FELT BAG - 9 CU FT., DISPOSABLE BAG LINER, PNEUMATIC TURF WHEEL KIT, 6" x 15' HOSE KIT, 4" x 15' HOSE KIT
WARRANTY	
1- YEAR LIMITED CONSUMER, 1- YEAR LIMITED COMMERCIAL	

	HURRICANE® BLOWER PLUS		
	6 HP/169 CC BLOWER	9 HP/265 CC BLOWER	14 HP/404 CC BLOWER
MODEL NUMBER	947106	947107	947108
ENGINE			
MANUFACTURER	SUBARU®		
HORSEPOWER/DISPLACEMENT	6 HP/169 cc	9 HP/265 cc	14 HP/404 cc
STARTING SYSTEM	RECOIL		
FUEL CAPACITY	0.95 GAL [3.6 L]	1.59 GAL [6.0 L]	1.85 GAL [7.0 L]
KEY FEATURES			
DRIVE SYSTEM	PUSH		
REMOTE THROTTLE CONTROL	STANDARD		
FRONT & SIDE DISCHARGE	STANDARD		
DISCHARGE SIZE	3" X 4.3" [7.6 X 10.9 cm]	3.85" X 5.0" [9.8 X 12.7 cm]	4.75" X 5.6" [12.1 X 14.2 cm]
HOUSING CONSTRUCTION	15 GA STEEL		
IMPELLER MATERIAL	10 GA STEEL - WELDED		
IMPELLER BLADES	10		
IMPELLER DIAMETER	13.5" [34.3 cm]	15.25" [38.7 cm]	18" [45.7 cm]
IMPELLER WIDTH	3" [7.6 cm]	4" [10.1 cm]	3.25" [8.3 cm]
HANDLE CONSTRUCTION	12 GA STEEL - WELDED		
HANDLE GRIP	CLOSED CELL FOAM		
CFM	1149	1642	2692
FPM	2108	3013	4938
MPH	150	177	207
WHEELS			
FRONT	8" X 2" SOLID	9" x 2.5" PNEUMATIC	
REAR	10" X 3.75" PNEUMATIC	10" X 3.75" PNEUMATIC	
DIMENSIONS			
OVERALL LENGTH (IN.)	48" [121.9 cm]	49" [124.5 cm]	50" [127 cm]
OVERALL WIDTH (IN.)	27" [68.6 cm]	31" [78.7 cm]	33" [83.8 cm]
OVERALL HEIGHT (IN.)	41" [104.1 cm]		
DRY WEIGHT (LBS.)	124 [56.2 kg]	157 [71.2 kg]	205 [93 kg]
ACCESSORIES/ATTACHMENTS			
HOSE KIT WITH PARKING BRAKE, FRONT SWIVEL CASTER WHEEL			
WARRANTY			
1 - YEAR LIMITED CONSUMER, 1- YEAR LIMITED COMMERCIAL			

	THATCH-0-MATIC	
	FLAIL	TINE
MODEL NUMBER	995028	995045
ENGINE		
MANUFACTURER	SUBARU®	
HORSEPOWER/DISPLACEMENT	6 HP/169 CC	
STARTING SYSTEM	RECOIL	
FUEL CAPACITY	0.95 GAL (3.6 L)	
DRIVE SYSTEM	PUSH	
CUTTING WIDTH	19" (48.3 cm)	
CUTTING HEIGHT	1"~ 4" (2.5 cm - 10.2 cm)	
CUTTING POSITIONS	11	
REEL	FLAIL REEL	TINE REEL
HOUSING MATERIAL	12 GA STEEL	
HOUSING CONSTRUCTION	FULLY WELDED	
DEFLECTOR	PIVOTS	
IDLER	SPRING LOADER PULLEY FOR POSITIVE ENGAGEMENT	
CONTROL SYSTEM	BAIL	
HANDLE	16 GA, 1" TUBULAR STEEL	
WHEELS		
FRONT AXLE	SEALED BEARING/STEEL HUB	
FRONT	8" X 1.75" - SOLID RUBBER	
REAR	10 X 3.5" SEMI-PNEUMATIC	
DIMENSIONS		
OVERALL LENGTH (IN.)	48" (121.9 cm)	
OVERALL WIDTH (IN.)	31" (78.7 cm)	
OVERALL HEIGHT (IN.)	38" (96.5 cm)	
DRY WEIGHT (LBS.)	120 (54.4 KG)	
ACCESSORIES/ATTACHMENTS		
TINE REEL ASSEMBLY, KNIFE REEL ASSEMBLY, FLAIL REEL ASSEMBLY, DEBRIS CATCHER		
WARRANTY		
1-YEAR LIMITED CONSUMER, 1-YEAR LIMITED COMMERCIAL		

	TRUCK LOADER		
	14 HP	20 HP	22 HP
MODEL NUMBER	995040	995041	995042
ENGINE			
MANUFACTURER	SUBARU®		
HORSEPOWER/DISPLACEMENT	14 HP / 404 CC	20 HP / 650 CC	22 HP / 650 CC
STARTING SYSTEM	RECOIL	ELECTRIC	
FUEL CAPACITY	1.8 GAL (7.0 L)	5.8 GAL (21.9 L)	
KEY FEATURES			
APPLICATION	COMMERCIAL TRASH/LEAF CLEAN UP		
PICK UP WAND CONSTRUCTION	ADJUSTABLE DOUBLE HANDLED, LIGHTWEIGHT, DURABLE STEEL		
IMPELLER	4-BLADE STEEL		5-BLADE STEEL
INTAKE HOSE CONSTRUCTION	CLEAR, WIRE ENFORCED		
INTAKE HOSE LENGTH	10' [3.0 m]	12' [3.7 m]	
INTAKE HOSE DIAMETER	8" [20.3 cm]	10" [25.4 cm]	12" [30.5 cm]
QUICK DISCONNECT	STANDARD		
HOUSING	11-GAUGE STEEL, FULLY WELDED		
INNER LINING	11-GAUGE STEEL BOLT IN REPLACEABLE LINERS		
FRAME	11- GAUGE SHEET METAL BOX FRAME		
DISCHARGE CHUTE	11-GAUGE STEEL WITH 360° ROTATION		
BATTERY	N/A	270 CCA MINIMUM	
DIMENSIONS			
OVERALL LENGTH (IN.)	29" (73.7 cm)		
OVERALL WIDTH (IN.)	29" (73.7 cm)		
OVERALL HEIGHT (IN.)	65" (165.1 cm)		
DRY WEIGHT (LBS.)	360 [163.3 kg]	571 (259 kg)	
ACCESSORIES/ATTACHMENTS			
	8" X 10' HOSE EXTENSION KIT, TAILGATE MOUNT KIT, 8" X 7" STEEL FLEX HOSE EXTENSION (EXHAUST), MULTI-DIRECTIONAL EXHAUST WITH ADJUSTABLE DEFLECTOR (CHUTE), 18" DISCHARGE EXTENSION, RECEIVER HITCH KIT, SWING AWAY HITCH KIT	TAILGATE MOUNT KIT, 8" X 7" STEEL FLEX HOSE EXTENSION (EXHAUST), MULTI-DIRECTIONAL EXHAUST WITH ADJUSTABLE DEFLECTOR (CHUTE), 18" DISCHARGE EXTENSION, TRAILER MOUNT KIT	
WARRANTY			
1- YEAR LIMITED CONSUMER, 1- YEAR LIMITED COMMERCIAL			

	POWER BRUSH		
MODEL NUMBER	921026	926058	926059
ENGINE			
MANUFACTURER	SUBARU®		
HORSEPOWER/DISPLACEMENT	169 cc	265 cc	287 cc
STARTING SYSTEM	120V/RECOIL		12V KEY START/RECOIL
FUEL CAPACITY	3.4 GAL (3.6 L)	5.7 GAL (6.1 L)	
DRIVE TYPE	DISC-O-MATIC		HYDROSTATIC
GROUND SPEED	6 FORWARD/2 REVERSE		INFINITE
CLEARING WIDTH	28" (71.2 cm)	36" (91.4 cm)	
BRUSH ROTATION ANGLE	40°		
BRUSH ROTATION CONTROL	REMOTE TRIGGER		
BRUSH DIAMETER	18" (46 Ccm)	25" (64 cm)	
WHEELS			
TIRE SIZE	15" X 5" (38.1 X 12.7 cm)	16" X 16.5" (41 X 17 cm)	
TIRE TYPE	DIRECTIONAL SNOW THREAD		
AXLE SYSTEM	AUTOMATIC TRACTION CONTROL		
FEATURES AT A GLANCE			
HALOGEN HEADLIGHT	NO	STANDARD	
HANDWARMERS	NO	NO	STANDARD
ELECTRIC START	STANDARD		
DIMENSIONS			
LENGTH (IN.)	65" (165.1 cm)	72" (182.9 cm)	72" (182.9 cm)
WIDTH (IN.)	34" (86.4 cm)	44" (111.8 cm)	44" (111.8 cm)
HEIGHT (IN.)	44" (111.8 cm)	43" (109.2cm)	43" (109.2 cm)
DRY WEIGHT (LBS.)	230 (104.3 kg)	325 (147.4 kg)	335 (151.9 kg)
ACCESSORIES/ATTACHMENTS			
	TURF CASTER KIT, TIRE CHAIN	SNOW CAB, DIRT DEFLECTOR, TIRE CHAIN, STEEL BRISTLE BRUSH HEAD	
WARRANTY			
3-YEAR LIMITED CONSUMER, 1-YEAR LIMITED COMMERCIAL (36"), 90-DAY LIMITED COMMERCIAL (28")			

POWERED BY KAWASAKI FOR SOME MIGHTY GOOD REASONS.

PRECISE SAE CERTIFIED HORSEPOWER

Tested, rated and expert-certified

INTERNALLY VENTED CARBURETOR

Correct, consistent air/fuel mix for power and response (DFI fuel injection available on select models)

POWERFUL FUEL PUMP

Optimum pressure and flow at full throttle and RPM

HIGH CAPACITY AIR CLEANER

Holds more dirt, moves more air

THREE-RING PISTONS, CAST-IRON CYLINDER LINERS

Triple-tight compression and iron-clad durability for the long haul

HEMISPHERICAL COMBUSTION CHAMBERS

Stronger fuel burn for maximum power per stroke

OVERHEAD V-VALVE TECHNOLOGY

Advanced valve design packs high performance into less space

PRESSURIZED LUBRICATION

Pushes oil into every part for full lubrication, deep cooling

ELECTRONIC SPARK IGNITION

Intense spark for quick starts, fast throttle response

AUTOMATIC COMPRESSION RELEASE

Easy starts with less stress on battery and starter



Kawasaki

Engines

According to lawn care pros, this is the best engine in the business: preferred nearly 2 to 1, top choice for reliability, performance, ease of maintenance, overall value, power, torque.* Just like Gravely, a Kawasaki engine is the right choice.

*According to survey of lawn care professionals conducted in June 2012 by Isometric Solutions, an independent research firm commissioned by Kawasaki Motors Corp., U.S.A.

PASSIONATE PEOPLE...ASTOUNDED CUSTOMERS

Gravely® is an Ariens® Company brand. Ariens Company has grown over its 80 year history to include premium brands in many segments of the outdoor power equipment industry. Ariens Company prides itself on invention, product reliability, continuous improvement, focus on the customer and pride in craftsmanship. To learn more about the different brands of products that Ariens Company offers, please visit WWW.ARIENS.COM.



WWW.GRAVELY.COM

An *Ariens* Company Brand



©2015 Copyright Ariens Company. All rights reserved. ® Registered trademark and ™ trademark of Ariens Company. Briggs & Stratton, Daihatsu, Hydro-Gear, Kawasaki, Kohler, Kubota, Ogura, Parker, Subaru and Warner are registered trademarks of their respective companies. The engine horsepower information is provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower will be less. Visit www.gravely.com for a complete listing of engine manufacturer power rating information. Product features and specifications are subject to change without notice. Photos are a representation of product; the actual product may differ.